

ETHSCOPE: A Transaction-centric Security Analytics Framework to Detect Malicious Smart Contracts on Ethereum

Lei Wu
lei_wu@zju.edu.cn
Zhejiang University

Siwei Wu
wusw1020@zju.edu.cn
Zhejiang University

Yajin Zhou*
yajin_zhou@zju.edu.cn
Zhejiang University

Runhuai Li
21821327@zju.edu.cn
Zhejiang University

Zhi Wang
zwang@cs.fsu.edu
Florida State University

Xiapu Luo
csxluo@comp.polyu.edu.hk
The Hong Kong Polytechnic
University

Cong Wang
congwang@cityu.edu.hk
City University of Hongkong

Kui Ren
kuiren@zju.edu.cn
Zhejiang University

ABSTRACT

As one of the representative blockchain platforms, Ethereum has attracted lots of attacks. Due to the potential financial loss, there is a pressing need to detect malicious smart contracts and understand their behaviors. Though there exist multiple systems for smart contract analysis, they cannot efficiently analyze a large number of transactions and re-execute smart contracts to introspect malicious behaviors.

In this paper, we urge for a *transaction-centric* security analytics framework for Ethereum, which provides an *efficient* way to quickly locate suspicious ones from a large number of transactions and *extensible* way to detect malicious smart contracts with analyst-provided scripts. We present the system design in the paper, which solves three technical challenges, i.e., incomplete states, scalability and extensibility. We have implemented a prototype system named EthScope to solve these challenges. In particular, the first component *Data Aggregator* collects and recovers critical blockchain states. The second component *Replay Engine* is able to replay arbitrary and a large number of transactions. The third component *Instrumentation Framework* exposes interfaces for an analyst to dynamically instrument smart contracts and introspect the execution of suspicious transactions. The comprehensive evaluation with six types of attacks demonstrated the effectiveness of our system. The performance evaluation shows that our system can perform a large scale analysis on suspicious transactions (more than 8 million ones) and has a speed up of around 2,300x compared with the JSTracer provided by Go-Ethereum. To engage the community, we will release our system and a dataset of detected attacks on <https://github.com/zjuicrs/ethscope>.

1 INTRODUCTION

With an explosive growth of the blockchain technique, Ethereum [1] has become one of representative platforms. One reason is possibly due to its inborn support of smart contracts. Developers use smart contracts to build DApps (decentralized applications), ranging from gaming, lottery, decentralized finance (DeFi), and cryptocurrency, e.g., ERC20 tokens [5].

At the same time, attacks targeting Ethereum are increasing. By exploiting vulnerabilities of smart contracts, attackers could make huge profits in a short time. For instance, in April 2016, attackers exploited the reentrancy vulnerability in the DAO smart contract and stole around 3.6 million Ether [48]. Attackers used the similar vulnerability to attack the decentralized exchange Uniswap [28] (July 2019) and DeFi (Decentralized Finance) application Lend.Me [27] (April, 2020). Besides, lots of other types of attacks have been observed in the wild [14, 16, 18].

Due to the huge financial loss, there is a pressing need to detect malicious smart contracts and understand their behaviors, which is crucial for effective solutions to mitigate the threat.

Existing approaches Existing approaches are mainly analyzing smart contracts to detect vulnerable ones. However, interactions between multiple smart contracts during real attacks make them ineffective to detect malicious ones. Specifically, a *real* attack usually requires the involvement of more than one smart contract. They interact with each other using *internal transactions*, which are similar to remote procedure calls in traditional computer programs. To detect malicious smart contracts, a system should have the capability to analyze their interactions (transactions) and re-execute (replay) smart contracts to observe malicious behaviors.

Specifically, existing systems roughly fall into two categories. The first category includes systems that mainly focus on the analysis of smart contract code, instead of transactions. They use static and dynamic methods [30, 35, 41, 43, 50], the fuzzing testing [38, 39, 42, 52] and the formal verification [40, 45, 49, 51] to analyze smart contracts and assess the security of them. Such approaches only provide a *static* view of smart contract code, i.e., whether they are vulnerable or not. They cannot provide a *dynamic* view of contract interactions (or transactions). The second category includes systems [31, 36, 37, 46] that hook into the Ethereum Virtual Machine (EVM) at runtime to detect malicious behaviors. However, they either need to re-execute all historical transactions (a time-consuming process) or leverage the JavaScript-based transaction tracing (JSTracer) [12] of the popular Ethereum client Geth [4] to monitor smart contract execution. This tracing mechanism is inefficient due to its frequent context switches between the EVM and the tracer (see the comparison result in Table 6). As a result, they suffer

*Corresponding author.

from the scalability issue when performing a large-scale analysis. For instance, we need to replay more than 8 millions transactions to detect the bad randomness attack (Section 5.3).

Transaction-centric approach We urge for a *transaction-centric* security analytics framework for Ethereum, which provides an *efficient* way to quickly locate suspicious ones from a large number of transactions and an *extensible* way to detect malicious smart contracts with analyst-provided scripts.

Specifically, instead of solely analyzing smart contract code, an analyst first locates suspicious transactions from multiple perspectives. For instance, transactions that create a loop between smart contracts, and transactions interact with vulnerable contracts reported by existing systems [40, 41, 43, 50, 51] are suspicious. After that, suspicious transactions are re-executed (or *replayed*) using a replay engine (a customized Ethereum Virtual Machine) to monitor the execution of smart contracts. Analyst-provided scripts will be invoked at certain places (instrumentation points in this paper) to spot malicious behaviors and detect malicious contracts.

Note that, our approach *does not* intend to replace existing systems [30, 35, 39–41, 43, 45, 49–51], but complements them to provide capabilities to detect malicious smart contracts. In fact, the output of existing systems could be a hint to locate suspicious transactions. For instance, transactions interact with vulnerable contracts reported by them are suspicious.

Though the basic idea is straightforward, building such a framework faces several technical challenges.

- (1) *Incomplete states*. In order to quickly locate suspicious transactions, the framework should collect *rich chain states* and provide an *efficient interface* to look up them. Note that, some critical intermediate states (Section 2.3) are not stored in Ethereum nodes by default.
- (2) *Scalability*. The framework should have the capability to efficiently replay *a large number of and arbitrary transactions*. Replaying a transaction is not an easy task, since the execution depends on blockchain historical states. Existing approaches that re-execute all or partial transactions [31, 36, 37, 46, 47] to recover historical states are not scalable.
- (3) *Extensibility*. The framework should be extensible to detect different types of attacks by providing different scripts, without the need to change the framework itself. Moreover, the performance overhead should be optimized, e.g., reducing the number of context switches between analysis scripts and the framework.

We have designed a framework with three components to solve these challenges. Specifically, the first component, i.e., *Data Aggregator*, collects and recovers critical blockchain states, including internal transactions, self-destructed smart contracts, account balance of each block, and etc. These states are usually missed or incomplete in publicly available services [3, 29] and research prototypes [33, 34]. It also provides an efficient interface to quickly locate suspicious transactions.

The second component, i.e., *Replay Engine*, is able to efficiently replay arbitrary and a large number of transactions. First, our system takes snapshots of the historical states for each transaction. Thus it can replay arbitrary transactions without executing unnecessary ones to recover historical states. Note that, the recovery of

historical states is a time-consuming process, which even makes the analysis impossible when the number of transactions is huge. Second, it parallelizes the replay process with multithreading, which speeds up this process.

The third component, i.e., *Instrumentation Framework*, exposes interfaces for an analyst to dynamically instrument smart contracts and introspect the execution of suspicious transactions. An analyst can develop analysis scripts (using the JavaScript language) to analyze suspicious transactions and detect malicious ones. Our framework reduces the performance overhead by a fine-grained design of instrumentation points and minimizes context switches between the EVM and the analysis script. Compared with the JS-Tracer [12] supported in Geth that will be triggered for each opcode, our framework is more flexible and efficient (Table 6). To ease the development of analysis scripts, our framework is equipped with a dynamic taint analysis engine that could be directly invoked with well-defined APIs.

We have implemented a prototype system named EthScope. In particular, *Data Aggregator* is implemented with around 1, 137 lines of changes to the Geth client. It uses the distributed search and analytics engine Elasticsearch [6] to store recovered blockchain states and provide an interface to query transactions. The *Replay Engine* and *Instrumentation Framework* are implemented with 5, 191 lines of changes to EVM.

To evaluate the effectiveness of our system, we use it to detect six types of attacks and report the result of two representative ones in the paper. Specifically, it successfully detected reentrancy attacks that have happened in the wild. Compared with other state-of-the-art tools, it can detect more vulnerable contracts that were previously unknown, while at the same time, has low false positive rate. We also present the result of detecting the bad randomness attack and understanding the attacker’s behaviors. The performance evaluation shows that our system is more efficient (around 2, 300x speed up) than existing ones when replaying transactions.

In summary, this paper makes the following main contributions:

- We proposed a transaction-centric approach to detect malicious smart contracts on Ethereum. It first locates suspicious transactions and then re-executes them to confirm the malicious behaviors.
- We implemented a prototype and illustrated methods to address three technical challenges, i.e., how to recover blockchain states and efficiently look up suspicious ones, how to replay arbitrary transactions, and how to provide extensible interfaces to instrument and introspect smart contract execution.
- We evaluated our system to detect six types of attacks occurred in Ethereum and presented the result of two representative attacks. The performance evaluation shows that our system is much more efficient (2, 300x speed up) when replaying transactions.

To engage the community, we will release our system and a dataset of detected attacks on <https://github.com/zjuicrs/ethscope>.

2 BACKGROUND

2.1 Ethereum Accounts

Each account in Ethereum has an address and associated balance in Ether. There exist two types of accounts, i.e., externally owned account (EOA) and smart contract account, respectively. EOAs

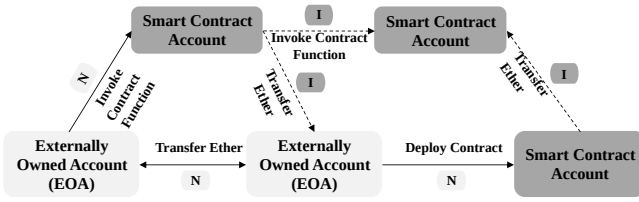


Figure 1: Normal and internal transactions. N: normal transactions; I: internal transactions.

are controlled by private keys, while smart contract accounts are controlled by their contract code [2]. Note that, both accounts can have Ether and other tokens, thus are associated with balances ¹.

The address of a new smart contract is calculated from the number of transactions being sent (nonce) and the address of its creator, which is the account that creates the smart contract. Due to this, the newly created contract address is predictable by its creator. We will illustrate an attack that exploits this property in Section 5.3.

2.2 Transactions

A transaction is a type of message call that serves three purposes, i.e., transferring Ether, deploying a smart contract, and invoking functions of a smart contract. Transactions on the Ethereum are normally initiated from EOAs, hence the name *normal transactions*.

Besides, there exists another type of transactions that are initiated from a smart contract. They are called *internal transactions*, which are used to invoke functions inside another smart contract, or transfer Ether to other accounts. For instance, the opcode `CALL` can be used to invoke a function of another smart contract, thus creating an internal transaction.

Note that, an internal transaction is always initiated from a normal transaction, since the smart contract that creates an internal transaction should be executed in the first place (from an EOA using a normal transaction.) Moreover, a normal transaction could create a large number of internal transactions, if the invoked smart contract does so (invoking functions of other smart contracts.)

Figure 1 shows an overview of normal and internal transactions.

2.3 Ethereum States

Ethereum nodes are devices participating in validating transactions. After synchronizing from the network as a full node, we can retrieve states about the blockchain, e.g., the number of blocks and transactions, from the node. We call the full blockchain data available on the disk of a full Ethereum node as *chain states*.

Besides, there exists another type of blockchain states called *intermediate states*. They are generated during the execution and validation of transactions, including *internal transactions* and *historical states of accounts* (including EOAs and smart contract accounts.) Historical states include the time-serial data about the change of balance, nonce, storage and code of each account in each block. They are crucial when replaying transactions. For instance, when re-executing an internal transaction T in the block B that invokes a function F in the smart contract S , we need to know the historical states of S when T was packed and executed in block B on the chain.

¹A smart contract account can have balances may contradict one’s intuition.

Normally, a full Ethereum node only contains chain states. When synchronizing from the network, users can specify an option, e.g., `-gcmode=archive` in Geth, to retain intermediate states with the cost of storage space. After that, users can use `debug.trace_transaction` API to re-run a transaction (or re-execute the smart contract) in the exact same manner as it was executed on the network. However, this method is not efficient. We will discuss the way used in our system to improve the performance of the replay process in Section 4.2.

2.4 Smart Contracts

Ethereum virtual machine A smart contract is a program that runs on an underlying Ethereum virtual machine (EVM for short) to transit the global state of the Ethereum network. A smart contract is usually programmed using a high level language, e.g., solidity, and then is compiled into low-level machine instructions (called *opcodes*), which will be fetched, decoded and executed by EVM.

EVM is a stack-based virtual machine. It has a virtual stack with 1,024 elements. All computations are performed on the stack. It means the operands, the result of intermediate operations are stored on the stack. For instance, when executing the `ADD` opcode to add two operands, EVM will pop two values from the stack, add them together and then push the result on the stack.

Besides the stack, there are four other types of data locations in EVM, *memory*, *storage*, *input field*, and *ret field*. The memory, input data and ret field are used to store temporary data such as function arguments, local variables, and return values. They are volatile, which means their values will be lost when the execution of a smart contract is finished. In contrast, the storage is a (per-account) persistent key-value store. It is used to maintain state variables of a smart contract in *each block*. For instance, a gaming smart contract could leverage the storage to maintain the balance of each player in each block.

Function invocation As discussed in Section 2.2, internal transactions are used to invoke smart contract functions. This is achieved through executing a message call [23] launched by six opcodes, including `CALL`, `CALLCODE`, `DELEGATECALL`, `STATICCALL`, `CREATE` and `CREATE2`.

In a smart contract, there is a signature (four bytes) to denote the destination function that will be invoked. The signature is defined as the first four bytes of the hash value (SHA3) of the canonical representation of the function, including the function name and the parenthesized list of parameter types. Since this is a one-way function, it is hard to retrieve the function name from the signature. However, there is an online service [21] that we can lookup the function name given a signature.

Smart contract creation and destruction A smart contract could be created using two opcodes, i.e., `CREATE` and `CREATE2`. Both opcodes behave similar, except the way to calculate the address of the newly created smart contract [10].

A smart contract could be self-destructed through the opcode `SELFDESTRUCT`. This opcode destroys the smart contract itself, and transfers all the Ether inside the contract to the address specified in the parameters of this opcode (the target address). However, if the account with the target address does not exist, this opcode

Table 1: States that could be retrieved. ×: not supported; ✓: fully supported; △: partially supported.

	Chain States	Internal Transactions	Historical States	Flexible Interface
Ethereum full node	✓	×	×	×
Ethereum archive node[22]	✓	×	✓	×
Etherscan	✓	△	✓	△
Ethereum in BigQuery[11]	✓	✓	×	✓
Our system	✓	✓	✓	✓

will create a new account with this address. This means that the SELFDESTRUCT opcode could implicitly create a new account.

3 SYSTEM DESIGN

In the following, we will illustrate technical challenges and then present the overall design of EthScope.

3.1 Technical Challenges

The basic idea of transaction-centric analysis is to first locate suspicious transactions and then re-execute the transactions to detect malicious smart contracts. Though the idea is straightforward, implementing such a system faces several technical challenges.

Incomplete chain states and intermediate states. Our system needs to provide an interface to look up suspicious transactions. Though there exist many methods that could be leveraged to explore normal transactions, few of them could be used for look up internal ones. For instance, users could send RPC requests to the Ethereum node to retrieve information about a normal transaction. However, internal transactions are not available on Ethereum nodes (both full and archive nodes.) Besides, historical states are crucial to replay a transaction. That’s because they provide the execution context at the time when the transaction was executed on the chain.

Moreover, our system should provide an efficient and flexible interface to query a large number of transactions and historical states. Unfortunately, no existing methods could satisfy our requirement. For instance, the most popular service that allows users to explore and search transactions is Etherscan [3]. But the network latency and the limit on the number of transactions could be queried (Etherscan only shows the latest 100,000 normal transactions for each account) make it ineffective. Table 1 shows a comparison of states that could be retrieved through each method.

Capability to replay arbitrary and a larger number of transactions. After locating suspicious transactions, our system re-executes them to detect malicious smart contracts. There exist two different types of methods to replay transactions, both of which suffer from the scalability issue.

The first one is to import the whole blockchain data with a customized EVM, which will execute all transactions (normal and internal ones) from the genesis block (the first block on the chain). Representative tools include ECFChecker [37], Sereum [46], AEGIS [36] and SODA [31]. This method cannot selectively replay interested transactions. Thus, many unrelated ones have been executed, consuming lots of time. For example, according to the official statistics [25], a full block importing costs *6d8h7m* with i3.2xlarge AWS EC2 instances.

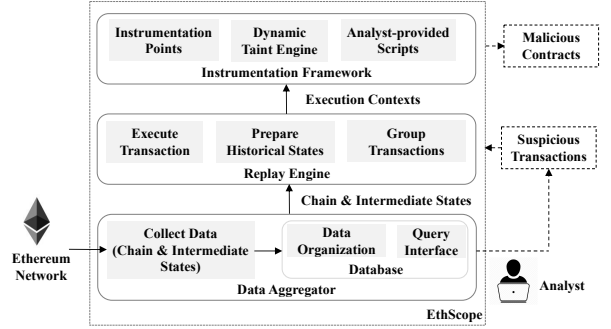


Figure 2: The overall design of EthScope.

The second way is to use the `debug.trace_transaction` API exposed by Geth, which allows users to *replay* a transaction with the Ethereum archive node. Though this method is more efficient than the previous one, it still suffers from the scalability issue. That’s because the granularity of historical states maintained by the Ethereum archive node is a block rather than a transaction. In order to replay a transaction, all the (unnecessary) transactions before this one inside the same block will be executed. Our system solves this challenge with a transaction-level granularity of historical states.

Extensibility with customized analysis scripts to detect different attacks. Our system should be extensible to detect multiple attacks with analyst-provided scripts without changing the underlying framework. Existing systems, e.g., ECFChecker, Sereum, AEGIS and SODA, modify the EVM to perform detection when importing the blockchain data. Due to the tight coupling between these systems and the importing process of blockchain data, they cannot be applied to selected transactions to detect attacks.

Geth has a mechanism called JSTracer [12] to introspect the execution of a smart contract. It allows users to specify a JavaScript file that will be invoked for every opcode executed. However, frequent switches between the EVM and the JavaScript file make it impractical to analyze a large number of transactions. Our system solves this challenge with two optimizations. First, it has well-defined instrumentation points to minimize the number of context switches. The analysis script will be invoked on-demand (instead of each opcode) when defined instrumentation points are hit. Second, our framework is equipped with a dynamic taint analysis engine inside the EVM. Analysts do not need to implement their own taint engine using JavaScript files, which further reduces the number of context switches.

3.2 Overall Design

We solve the challenges with three components, i.e., *Data Aggregator*, *Replay Engine*, and *Instrumentation Framework*. Figure 2 shows the overall system design.

Specifically, *Data Aggregator* imports the whole blockchain data and collects chain states and intermediate states. In particular, chain states could be directly retrieved by sending RPC requests to the

```

1 func (s *stateObject) setState(key, value common.Hash) {
2     s.dirtyStorage[key] = value
3     // capture data
4     s.db.JournalCapture.SetCSSStorage(s.address, key, value)
5 }

```

Figure 3: The code snippet to capture intermediate states when executing the SSTORE opcode.

Ethereum node, while intermediate states are collected by modifying the EVM. Collected states are stored in a cluster database equipped with a flexible query interface for further analysis. Note that, the process to import the blockchain data is a one-time effort. All the saved states could be queried and used without the need to import the chain data again.

The second component, i.e., *Replay Engine*, is used to replay arbitrary transactions. In particular, an analyst first locates suspicious transaction and feeds them the engine. The *Replay Engine* retrieves transactions that need to be analyzed and then obtains the historical states for each transaction. After that, it re-executes the transaction. This process is paralleled according to the number of transactions and number of CPU cores.

The third component, i.e., *Instrumentation Framework*, provides a mechanism to customize the analysis. Specifically, an analyst can write his or her own analysis scripts by defining callback functions for instrumentation points. For instance, a specific callback function could be defined and will be invoked if and only if the CALL opcode is executed. By doing so, our system avoids unnecessary context switches between EVM and the analysis script. During this process, EVM states, including related stack and memory values are provided to the script. Moreover, to facilitate the development of analysis scripts, a dynamic taint engine is provided by our system with well-defined APIs.

4 IMPLEMENTATION DETAILS

We have implemented a prototype system named EthScope. In particular, *Data Aggregator* is implemented with around 1,137 lines changes to the Geth client. Our system uses the distributed search and analytics engine Elasticsearch [6] to store recovered blockchain states and provide an interface to query transactions. The *Replay Engine* and *Instrumentation Framework* are implemented with 5,191 lines changes to the EVM. In the following sections, we will elaborate the implementation details of each component.

4.1 Data Aggregator

In order to collect chain and intermediate states, we modified the Ethereum client Geth. The collected data is stored into a database, which provides a query interface for an analyst to locate suspicious transactions.

States collection The process of chain states collection is straightforward. Our system changes the EVM to collect the data before the execution of each block (block information) and after the execution of each transaction (normal transactions).

Collecting intermediate states requires our system to hook into the process of executing smart contracts. For instance, when the opcode SSTORE is executed, the method `setState` in EVM is triggered. We change this method and add the code to collect the captured states. Figure 3 is a the code snippet in `state_object.go`. We added

a class called `JournalCapture` to capture intermediate states. Note that, the states are not immediately stored into the underlying database. Instead, we create a buffer and write the states into the database when the buffer is full.

One issue is how to ensure the completeness and correctness of collected states. In our system, we solve this issue by comparing the collected states with ground truths. Specifically, for chain states, we can easily compare them with the data stored inside the Ethereum node. However, internal transactions are not available in the Ethereum node. To this end, we compare our data with the data provided by online services, i.e., Etherscan. Note that, this process is continuously performed for newly collected states.

Data organization and query interface Our system leverages the Elasticsearch [6] to store the collected states. Table 8 in Appendix shows the detailed data schema.

Specifically, the `Block` index² stores the information about a block and transactions inside the block. To quickly retrieve necessary historical states when replying a transaction, we group them into a nested field called `Transaction`. This transaction-level granularity of historical states makes the replay of arbitrary transactions efficient, since we do not need to execute unnecessary transactions inside the same block to recover the states. Besides `Block`, we have two extra indices `State` and `Code` to store the states about accounts and the information of the process to create and destruct accounts.

Thanks to the Elasticsearch, an analyst could leverage the Query DSL based on JSON to define queries [7] to locate suspicious transactions.

4.2 Replay Engine

In order to monitor the behaviors of smart contracts and capture the interactions between them, we build an engine that is capable of *replaying* arbitrary transactions on blockchain. Our engine is based on Geth, with modifications to prune unnecessary components and add support to retrieve states from *Data Aggregator*. Moreover, it provides interfaces to communicate with *Instrumentation Framework*, which we will discuss in Section 4.3.

Group transactions The input to *Replay Engine* is a list of hash values for the suspicious transactions. In order to speed up the process of obtaining related data from *Data Aggregator*, our system divides transactions into different groups, with a threshold that each group contains no more than 10,000 transactions. This threshold is related to the size of the system memory. During this process, transactions belong to the same block are inside the same group. After that, *Replay Engine* replays each transaction, which consists of two steps, i.e., preparing historical states, and executing the transaction.

Retrieve historical states In order to replay a transaction, we need to retrieve historical states from *Data Aggregator*. First, we need to get the block and transaction information such as `Difficulty` and `GasLimit` from the `Block` index. Second, we need to retrieve the code of smart contracts that are related to this transaction in the nested field `GetCodeList` inside the field `Transactions`. That’s because a normal transactions could initialize internal transactions with multiple smart contracts. We need to retrieve the code for

²The index in Elasticsearch is similar to the database in a relational database.

Table 2: Three types of instrumentation points supported in our system. O: opcode-orientated; T: transaction-orientated; C: context-orientated.

Instrumentation Points	Type	Description
{op} after{Op}	O	before and after the opcode {op} is executed
transactionStart transactionEnd	T	before and after an external transaction is executed
contractStart contractEnd	C	before and after a new contract is executed

all the contracts. Third, we obtain all account states, e.g., nonce, balance and storage values of accounts that the transaction will read from the the nested field `ReadCommittedState`. Note that, the retrieved data constructs a snapshot of blockchain states that the transaction needs to be re-executed.

However, for some transactions, our system needs extra states. One case is when a transaction is to create a new smart contract. In this case, we need to retrieve the deploying code of the new smart contract from the index `Code`. Table 8 in Appendix shows the detailed information for the mentioned fields and indices.

Execute the transaction After retrieving historical states, *Replay Engine* executes the transaction. During this process, callback functions defined in the analysis script will be invoked.

In order to speed up the process of executing transactions, our system further divides transactions into different groups according to the number of CPU cores, and executes transactions inside different groups in parallel. This optimization can achieve a 10x speed up (Table 7).

4.3 Instrumentation Framework

Instrumentation Framework aims to provide extensible APIs for an analyst to develop scripts to detect attacks. Besides, *Instrumentation Framework* provides a dynamic taint engine to facilitate the analysis.

Overview The framework is hooked into the *Replay Engine* and provides JavaScript interfaces to interact with the *Replay Engine*. Our system uses the Duktape JavaScript engine bindings for Go [8] to execute JavaScript functions inside the EVM (developed using the Go language.) Specifically, it defines instrumentation points, where the replay will be suspended and user-defined callback functions (in JavaScript) will be invoked. At the same time, it provides the interfaces for analysis scripts to access the current execution context, e.g., stack values, memory values. When the callback function ends, the *Replay Engine* continues the execution of the smart contract from the program counter after the instrumentation point.

Note that, user-defined callback functions can only observe the execution context. They cannot make any changes to the stack and memory values. Otherwise, the execution after the instrumentation point could be broken, since important states of the EVM may have been corrupted. However, our framework does support the explicit change of a control flow through an API named `cfg.hijack()` (Table 3). This is useful when we want to perform force-execution [44], i.e., deliberately executing a program path.

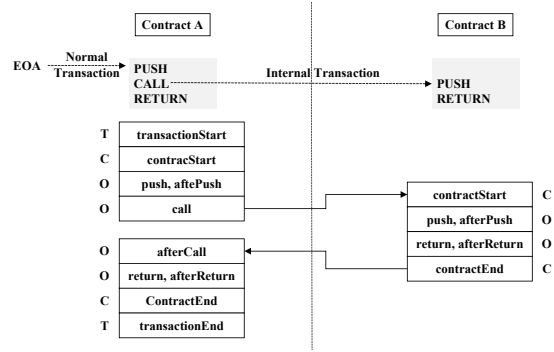


Figure 4: The sequence of invoking callback functions at different types of instrumentation points. The code of the smart contract is for illustration only. O: opcode-orientated; T: transaction-orientated; C: contract-orientated.

Instrumentation points Our system supports three types of instrumentation points, i.e., *opcode-*, *transaction-* and *contract-*orientated ones. Table 2 shows an overview of these instrumentation points.

First, the *opcode-orientated* instrumentation point links with two callback functions for each opcode, {op} and after{Op}. They are launched before and after executing the opcode {op}.

Second, *transaction-orientated* callbacks, `transactionStart` and `transactionEnd`, are launched before and after a transaction is executed. These two instrumentation points are usually used for the initialization and processing result in an analysis script. Note that, this type of instrumentation points only works for normal transactions, which are initialized from EOAs. For internal transactions that are initialized from smart contracts, they are covered in the contract-orientated instrumentation point.

Third, the *contract-orientated* callback functions, `contractStart` and `contractEnd`, deal with function calls crossing smart contracts (internal transactions.) These two functions are invoked at the start and at the end of the execution of a smart contract function.

Figure 4 shows the sequence of invoking callback functions at different instrumentation points. When an EOA issues a normal transaction, `transactionStart` will be invoked first, and then `contractStart` is executed. That's because the normal transaction initializes the execution of smart contract A. Then the callback functions for each opcode are launched, until the `CALL` opcode. This opcode invokes the function inside the smart contract B and creates an internal transaction. Since the smart contract B is executed, `contractStart` will be invoked again. After that, callback functions for different opcodes will be invoked accordingly.

Note that, the context is switched from the EVM to the Duktape JavaScript engine to execute the analysis script, only when the callback function is defined and the instrument point is hit at runtime. This minimizes the number of context switches between EVM and Duktape. Compared with the JSTracer inside the EVM, our implementation is more efficient.

Execution contexts When a callback function is invoked, it can observe the execution context through APIs provided by our system. However, there exist multiple ways that an internal transaction

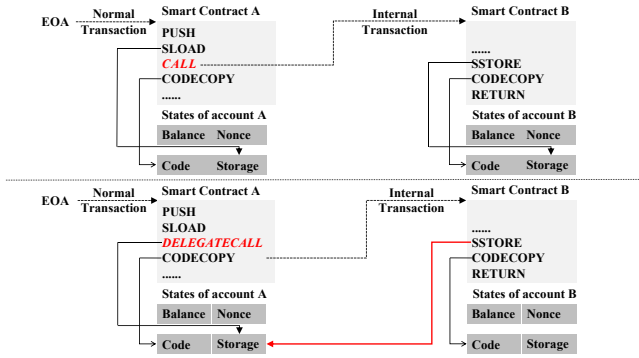


Figure 5: Contexts of the SLOAD and SSTORE opcodes are different when internal transactions are initialized through the CALL and DELEGATECALL opcodes.

could be triggered, which makes the execution context more complicated.

Specifically, there are six different opcodes that will trigger an internal transaction to execute a new smart contract function, including CALL, STATICCALL, CALLCODE, DELEGATECALL, CREATE and CREATE2. When the EVM triggers an internal transaction, it will construct a new execution context with the callee address. It also sets two critical variables, i.e., `self` and `CodeAddr` to indicate context contract and code contract³, respectively. The `CodeAddr` is always set to the address of the callee contract. However, when the internal transaction is triggered through executing DELEGATECALL and CALLCODE, EVM will set the `self` to the address of the caller contract. Otherwise EVM will set the `self` to the callee address.

Accordingly, opcodes SLOAD and SSTORE interact with the storage of the contract that `self` points to. Opcodes CODECOPY and CODESIZE get information about the code of the contract that `CodeAddr` points to. Figure 5 illustrates this process.

APIs to retrieve the execution context Our system provides multiple APIs to get the information of current execution context. Table 3 shows an overview of these APIs. We elaborate some of them in the following.

- *Normal transactions.* Attributes of normal transactions are obtained by invoking `getBlockNumber`, `getTxnIndex` and `getTxnHash`. These attributes are used to distinguish different normal transactions.
- *Internal transactions.* Two APIs `contract.getSelfAddress` and `contract.getCodeAddress` are used to retrieve the context contract and code contract. The API `contract.getValue` returns the amount of Ether that is transferred into the code contract. Every time an internal transaction starts, the EVM stack depth will increase by one. On the contrary, every time an internal transaction ends, it will decrease by one. The API `getDepth` is provided to get current EVM stack depth. By using this information, we can detect the occurrence of a recursive function call.
- *Parameters and return values.* The API `contract.getInput` returns the input data (parameters) when invoking a function, while `getReturnData` obtains return values of a function call.

³We follow the names used by Geth.

```

1 {
2   sload: function(log) {
3     contextContract = toHex(log.contract.getSelfAddress())
4     key = log.stack.peek(0).toString(16)
5     tag = contract+"_"+key
6     log.taint.labelStack(0, tag)
7   },
8
9   jumpi: function(log) {
10    tags = log.taint.peekStack(1)
11    for (tag in tags) {
12      contextContract = tag.substring(0, tag.indexOf("_"))
13      key = tag.substring(tag.indexOf("_"))
14      console.log("Storage", key, "in contract",
15                contextContract, "influenced the control flow.")
16    }
17 }

```

Figure 6: An example of how to use the dynamic taint engine to assign and check taint tags.

Our system do not provide APIs to access storage variables, since only SLOAD and SSTORE can operate on storage variables. Analysts can easily observe their values by defining callback functions of these two opcodes.

- *The program counter and remaining gas.* APIs `getPc` and `getGas` return the current program counter and remaining gas.

Dynamic taint engine Dynamic taint analysis has been widely used for security applications. Our framework implements a dynamic taint engine that facilitates the development of analysis scripts. In our implementation, the granularity of taint tags for stack, storage is 32 bytes. That's because the size of each entry in stack and storage is 32 bytes. However, our system assign each taint tag for each byte in the memory.

Our taint analysis engine supports the taint tag prorgation crossing different smart contracts. When the EVM triggers an internal transaction, it will pass input values from the caller's memory to the callee's input field. When the invocation returns, the return values is put into the caller's ret field. We propagate the taint tags in opcodes CALLDATALOAD, CALLDATACOPY, RETURNDATACOPY that operate on stack, memory, ret and input field.

Table 3 shows APIs to assign, clear and check taint tags. APIs `label*` and `clear*` allow analysts to assign and clear tags. APIs `peek*` allow analysts to check taint tags. Figure 6 shows an example of how to use these APIs. Specifically, two callback functions `sload` and `jumpi` are invoked before executing opcodes SLOAD and JUMPI, respectively. Inside the callback function `sload`, it assigns the taint tag to the value on the top of the stack (index 0) using `log.taint.labelStack(0, tag)`. Then the taint engine will propagate the tag, even crossing different contracts. When the callback function `jumpi` is executed, the `log.taint.peekStack(1)` checks whether the second value on the stack (index 1) has the taint tag. Note that, the JUMPI instruction checks the second value on the stack and changes the program counter if the value is true. Thus, by checking the taint tag, analysts can understand which storage variables can influence the control flow.

Table 3: APIs provided by our instrumentation framework.

APIs to retrieve execution context					
op.getN() op.toNumber() op.toString()	stack.length() stack.peek(n)	memory.slice(start, end) memory.getUint(offset)	contract.getSelfAddress() contract.getCodeAddress() contract.getValue() contract.getInput()	getBlockNumber() getTxnIndex() getTxnHash()	getPc() getGas() getDepth() getReturnData()
Other APIs			params.get(key)		
cfg.hijack(isJump)					
APIs to assign, clear and check taint tags					
labelStack(n,tag) clearStack(n) peekStack(n)	labelMemory(offset,size,tag) clearMemory(offset,size) peekMemory(offset) peekMemorySlice(offset,size)	labelInput(o,s,t) clearInput(o,s) peekInput(o) peekInputSlice(o,s)	labelReturnData(o,s,t) clearReturnData(o,s) peekReturnData(o) peekReturnDataSlice(o,s)	labelStorage(addr,slot,tag) clearStorage(addr,slot) peekStorage(addr,slot)	

Table 4: The overall results of attacks detected by our system. The evaluation is performed with the *Data Aggregator* that has 9,900,000 blocks. The table shows the number of suspicious transactions after querying the *Data Aggregator* and malicious transactions after verifying by the *Replay Engine*. We also show the number of victim accounts that have been exploited and attackers’ accounts. (NOR: normal transaction. INT: internal transactions. EOA: externally owned account. CON:contract account.)

# of Blocks	# of Transactions		# of Accounts	
9.9M	NOR 684,664,752 INT: 852,741,697		EOA: 88,561,717 CON: 24,998,114	
Attacks	# of Suspicious Transactions	# of Malicious Transactions	# of Victims	# of Attackers
Short address attack	NOR: 240 INT: 35		EOA: 35 CON: 0	48 0
ERC20 Token AirDrop	NOR: 96,223 INT: 10,147,646		EOA: 0 CON: 669	20,866 1,024
DoS Attack I: EXTCODESIZE	NOR: 8,986 INT: 487,643	3,221 125,952		EOA: 22 CON: 1
DoS Attack II: SUICIDE	NOR: 38,934 INT: 19,165,363	38,840 19,154,939		EOA: 43 CON: 104
Integer overflow	NOR: 12,299 INT: 472,338	505 489	EOA: 0 CON: 38	114 0
Reentrancy	NOR: 20,101 INT: 617,371	2,952 434,846	EOA: 0 CON: 49	89 89
Bad Randomness	NOR: 8,466,950 INT: 142,042,821	40,414 806,317	EOA: 0 CON: 102	261 227

5 EVALUATION

In the following, we will first evaluate the effectiveness of our system by detecting multiple types of attacks, and then report the system’s performance.

5.1 Overall Results

We have leveraged our system to detect six types attacks, including the short address attack [20], abuse the AirDrop mechanism to obtain bonus, DoS attacks using the EXTCODESIZE and SUICIDE opcodes [32], integer overflow [14, 15, 17–19], the reentrancy attack and bad randomness attack.

Table 4 shows the overall results of attacks detected by our system. We report the number of suspicious transactions and malicious ones after querying to the *Data Aggregator* and verifying by the *Replay Engine*. We also show the number of victim accounts and attacker’s accounts in the table. Due to the page limit, we will report

the detection result of two representative attacks, i.e., reentrancy and bad randomness, in this paper.

5.2 Reentrancy Attack

Understand the attack The reentrancy attack is well-known on Ethereum. For instance, attackers leveraged the reentrancy vulnerability to launch the attack towards the DAO smart contract and stole 3.6 million Ether [48].

The root cause of the attack is developers do not have a full understanding of the fallback function [24] used in the Solidity language. In particular, a fallback function does not have any arguments. It can be reached externally and does not return anything. This function will be implicitly invoked in multiple cases, e.g., when a contract receives Ether without any other data. As a result, the fallback function of a malicious smart contract could create a reentrant call to vulnerable smart contracts. As a result, Ether will be transferred to attacker-controlled smart contracts before the remaining balance is updated.

To detect the reentrancy attack, we need to first understand it and then locate suspicious transactions. To this end, we leverage a known malicious transaction that exploited the vulnerability and constructed a dynamic call graph to illustrate the attack. In particular, our *Data Aggregator* has the full information of internal transactions. We traverse all the internal transactions triggered by a known malicious normal transaction between smart contracts to construct the call graph.

Figure 7 shows the dynamic call graph. In the graph, nodes represent accounts, while edge are transactions. The serial numbers of transaction are in the chronological order. The 0th transaction is a normal transaction, and others are internal transactions triggered by the normal transaction. For best illustration, we only use the first 20 internal transactions to draw the graph. The actual number of internal transactions triggered is 185.

By looking up this graph, we can find two distinct features of transactions that launches the attack. First, there should exist a loop in the graph. This is reasonable since the call to the fallback function that further invokes the vulnerable contracts will create a loop in the call graph. For instance, internal transactions 2, 7 and 8 create a loop that starts from and ends at the malicious contract (0xc0ee9db). Second, there should exist a special smart contract called *reentry point*, which is the smart contract that will be invoked again before its previous invocation completes. For instance, the DAO contract (0xbb9bc2) is a *reentry point*, since the

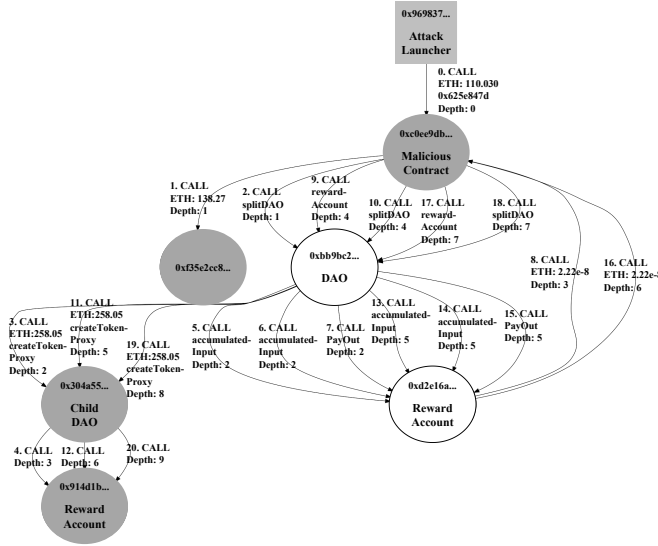


Figure 7: The dynamic call graph of an internal transaction that exploits the *reentrancy* vulnerability of the DAO smart contract. We use four lines to describe an internal transaction: 1. Serial number and the opcode to trigger an internal transaction; 2. Transferred Ether, null means no Ether transferred; 3. Invoked function (we search the name from the 4byte function signature database [21]), null means that the input data is empty; 4. EVM stack depth. (EOA: rectangle; smart contract: ellipse. Attacker: gray; Victim: white.)

EVM stack depths of internal transactions (index 3 to 9) are all bigger than internal transaction 2. That means before an invocation to the DAO contract (0xbb9bc2) (internal transaction 2) returns, another invocation (internal transaction 9) to the same contract happens.

Locate suspicious transactions After understanding the attack, we use the following two rules to lookup suspicious transactions that may launch the reentrancy attack. In particular, we label a normal transaction as a suspicious one, when

- (1) Internal transactions triggered by this normal transaction create a loop that contains at least one *reentry point*. This detects the existences of reentrant function calls.
- (2) There is *at least one internal transaction* that involves with the Ether or ERC20 token transfer. This rule is to remove transactions that do not cause any change to the Ether or REC20 tokens. They are not real attacks since no financial benefits are achieved during this process.

Detect attacks We further replay suspicious transactions to detect attacks. During this process, an analysis script is invoked (Figure 14 in Appendix). Inspired by the four *reentrancy* patterns summarized in the Sereum paper [46], our system first constructs a set of variables that could influence jump targets of the JUMPI opcode or values of transferred Ether. Thanks to the dynamic taint engine of our system, we can check whether a variable could influence the control flow by checking the taint tag of the second top value on the stack (`taint.peekStack(1)`). For each variable v in this set, we define the callback function for the SSTORE opcode to monitor

```

1 function doWithdraw(address from, address to, uint256 amount)
  internal {
2 // only use in emergencies!
3 // you can only get a little at a time.
4 // we will hodl the rest for you.
5
6 require(amount <= MAX_WITHDRAWAL);
7 require(balances[from] >= amount);
8 require(withdrawalCount[from] < 3);
9
10 balances[from] = balances[from].sub(amount);
11 // reentry point
12 to.call.value(amount)();
13 withdrawalCount[from] = withdrawalCount[from].add(1);
14 }

```

Figure 8: The code snippet of HODLWallet.

whether the variable has been updated after the reentrant point. If so, we will label the normal transaction as malicious.

Detection result As shown in Table 4, our system located 20, 101 suspicious (normal) transactions. After replaying them, our system detected 2, 952 malicious normal transactions and 434, 846 malicious internal transactions, initialed from 89 EOAs and 89 malicious smart contracts. Attackers are targeting 49 victims, which are shown in Table 10 in Appendix.

We manually analyzed each detected attack. During the analysis, we only considers transactions that have caused financial loss as true positives (real attacks). Our analysis shows that there are 3 false positives (marked with * in Table 10). We show the detailed analysis of one false positive in the following.

Our system reported one attack targeting HODLWallet. Figure 8 shows the code snippet of the `doWithdraw` function. Specifically, the variable `withdrawalCount[from]` in line 8 influences the control flow. Also this variable is updated after the reentry point in line 13. Thus, our system detects this as a real reentrancy attack. However, the transaction does not cause any financial loss since the balance `balances[from]` has been updated in line 10 (before the reentry point.) This is a false positive, though technically it is still a reentrancy attack that targets `withdrawalCount[from]` instead of `balances[from]`.

Comparison with state-of-the-art tools There are multiple systems that aim to detect the reentrancy vulnerability. Though the main purpose of our system is to detect attacks, we can still compare our result of victim contracts with that reported by other tools. In this paper, we compare our result with two state-of-the-art tools, Sereum [46] and SODA [31]. Since the result of SODA has covered vulnerable contracts reported by Sereum, we will directly compare our system with SODA. For a fair comparison, if not specified, we only use the result before 8.18 million blocks, which is same with SODA.

In particular, SODA reported 31 vulnerable contracts, with 5 false positives and 26 true positives. Among 5 false positives reported by SODA, only 1 (HODLWallet) was also reported by our system. This means our system has lower false positives than SODA. For the 26 true positives reported by SODA, we detected 25 of them. Our further analysis shows that the remaining one (address is 0x59ABb8006B30D7357869760d21B4965475198d9D) is actually not

```

1  function sell(bytes32 hash, uint amount) public {
2      .....
3      msg.sender.transfer(total);
4      // reentry point
5      ERC20(info.token).transfer(info.owner, tradeAmount);
6      info.fill = info.fill.add(total);
7      emit Trade(hash, msg.sender, info.token, tradeAmount, info.
            owner, total);
8  }

```

Figure 9: The code snippet of DecentralizedExchanges.

Table 5: Vulnerable contracts detected by our system but missed in SODA. The last column shows the number of blocks when the contract was created.

Contract Address	Name	Birth Block
1. 0x3e64b1a66f3aa6f0765b0935640481aa690c2b9b7	Anonymous	9, 269, 257
2. 0x857a8d8aa8d83562f9118405335bd4a1fb523317	L_bank	9, 264, 766
3. 0xfdb27beadad89f8282c51f5e5a4e77c1f19d7220	CB_Bank	9, 232, 237
4. 0x4b23577c0672ab1e436097b7daceadb75e5721c6	Pg_Bank	9, 141, 714
5. 0xf1fc45b540e6c9f094ae656d2e34ad11cdfdb187	Uniswap	9, 059, 910
6. 0x4122073496955adb48e9a1dfaf6e456631b595a1	Anonymous	8, 986, 537
7. 0x2d5df43d54ae164a912db8de092cf707b446f693	CA_BANK	8, 986, 090
8. 0xb3e396f500df265cdfde30ec6e80dbf99bee9e96	pg_bank	8, 976, 703
9. 0x83a3a9b3068911b55a3989df0e642f487d08e424	CA_BANK	8, 943, 011
10. 0x6e3c384480e71792948c29e9fc8d7b9c9d75ae8f	p_bank	8, 910, 477
11. 0x55791ea128a7b7fc871272d9147435a3abb3d1eb	Anonymous	8, 783, 685
12. 0x7c6220c9537946a0861d7e86f6423af526f41375	Anonymous	8, 783, 636
13. 0xac629878277bf6a2fc46857eac4d4d17bfa330f	Anonymous	8, 783, 537
14. 0xf5cfff81d51e81596519ecf61830cb084037a2218	Anonymous	8, 783, 364
15. 0xdd71e35f680bb5adc77c6d1d9ef5793598e613dc	Piggy_Bank	8, 775, 620
16. 0x0eee3e3828a45f7601d5f54bf49bb01d1a9df5ea	Lend.Me	8, 295, 432
17. 0x3ac969b43affc4e0684dc52dc3072b109d0e348d	Bank	7, 251, 979
18. 0x8ce53575e1ce89131b370cbde602ce8cfa4f7805	Anonymous	6, 772, 010
19. 0x72f60eca0db6811274215694129661151f97982e	Decentralized-Exchanges	6, 648, 350
20. 0xd4cd7c881f5ceeece4917d856ce73f510d7d0769e	Decentralized-Exchanges	6, 671, 456

vulnerable, and should not be reported. This means the SODA system mis-classified this smart contract as a true positive.

There are 20 vulnerable contracts reported by our system but are missed by SODA (Table 5). Among them, 16 were created after 8.18 million blocks. Attacks targeting smart contracts 17 and 18 happened after 8.18 million blocks, though the contracts themselves were created before that time. For the remaining two (19 and 20), they are susceptible to the reentrancy vulnerability but are mis-classified by SODA as false positives. Specifically, both of these two contracts are called DecentralizedExchanges. The code snippet of the contract is shown in Figure 9. In particular, the code in line 5 is a reentry point. The variable `info.fill` is the one checked before and updated after the reentry point.

5.3 Bad Randomness Attack

Understand the attack Smart contracts need to use pseudo-random number in some cases. For instance, the popular game Fomo3D [26] has a marketing mechanism to attract players. It *randomly* sends bonus to game players, who have transferred Ether to the game (buy the key). This marketing mechanism is called AirDrop. In particular, it uses timestamp, difficulty, beneficiary address and gas limit of current block and caller’s (player’s) account address to determine whether the player could win the AirDrop bonus.

However, sources to determine winners are predictable. Attackers could use a smart contract to execute the same algorithm and use same random number sources to predict whether itself could

win the bonus. If so, the contract will transfer a small number of Ether to play the game and become the winner of the AirDrop bonus [26].

Locate suspicious transactions We use the following query to locate suspicious transactions. In particular, we find normal transactions that have triggered more than one internal transaction that transfers Ether. That’s because in order to launch the attack, attackers have to use a contract to transfer Ether to play the game, thus creating an internal transaction. Compared with the rules used in previous attack, it is a general one and will find a large number of transactions. This is intentional since we want to include as many suspicious transactions as possible in this step, and leverage the replay engine to confirm the attack.

Detect attacks The key observation of this attack is that the attacking contract is running a same algorithm using same random number sources with the victim contract. The detection script is shown in Figure 15 in Appendix.

- First, we find all the variables that are generated from block information, e.g., coinbase, gaslimit and etc. This is implemented using our taint analysis engine by setting the block information as taint sources.
- Second, for each variable v found in the previous step, we check whether it influences the control flow of the smart contract. That’s because we only care the variables that can determine the winner. If so, we log its execution context C .
- If there exist two same execution contexts in different internal transactions that are triggered by a same normal transaction, then the normal transaction is a malicious one that launches the attack. That’s because two smart contracts are executing a same algorithm from same random number sources to generate a variable that can influence the control flow to determine the winner.

Detection result We replayed 8, 466, 950 normal transactions with our analysis script. After that, 40, 414 normal transactions are labeled as malicious ones. During this process, 227 malicious smart contracts are detected. We then group these malicious contracts based on their creators, i.e., EOAs that create these contracts. In total, we get 79 groups that are shown in Table 11 in Appendix. We manually checked the malicious smart contracts created in each group and found that 74 of them are true positives. In total, they have initialized 40, 358 normal transactions to attack 95 victim smart contracts (after removing false positives.) Table 12 in Appendix shows the detailed information of victim contracts.

Case study: Fomo3D To fully understand the attack to Fomo3D, we performed a detailed analysis using our system. Our first step is to construct the money flow graph. The intuition behind this is that the money will eventually flow into (successful) attackers. Figure 10 shows the money flow graph constructed using transactions retrieved from the *Data Aggregator*. Specifically, nodes in the graph represent accounts, and edges represent the direct and indirect transactions with the Fomo3D game. The size of each node denotes the number of Ether it receives.

Several accounts in the figure have a much larger size than others. These accounts have received much more Ether from the game than others. An initial analysis shows that three of them

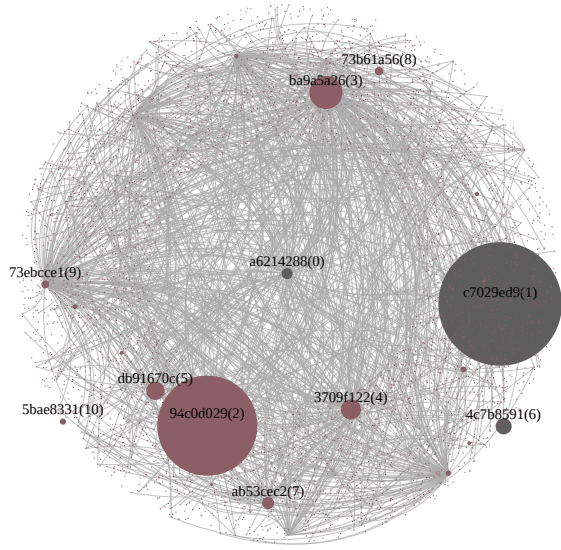


Figure 10: The money flow graph of the Fomo3D smart contract. For better illustration, we use 180, 244 transactions to generate this graph. The total number of transactions with the Fomo3D smart contract is much larger.

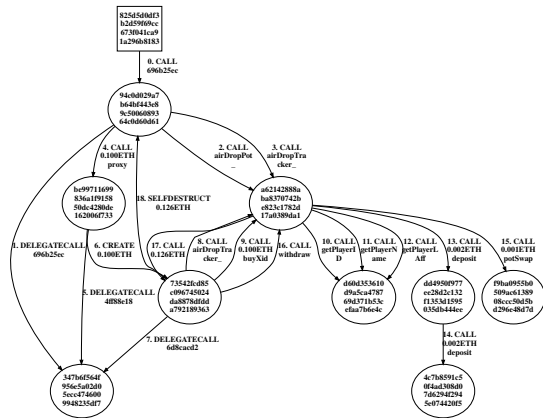


Figure 11: The dynamic call graph of a transaction from contract 0x94c0d029a7b64bf443e89c5006089364c0d60d61, a malicious contract that is attacking the Fomo3D game to get the Airdrop rewards.

belong to Fomo3D (number 0, 1 and 6). We then take a further analysis on other accounts.

Specifically, we analyzed transactions from the smart contract 0x94c0d029a7b64bf443e89c5006089364c0d60d61 to understand why the Ether in this smart contract accumulates. To this end, we first find an internal transaction initiated from this smart contract, which eventually receives Ether from the Fomo3D game. Then we construct the dynamic call graph (Figure 11). The call sequence of this




Figure 12: The flow of the bad randomness attack.

graph shows that, the contract (0x94c0d029a) transfers 0.1 Ether to 0xbe997116 (index 4), which further creates a new smart contract 0x73542fcd (index 6). This contract buys the key (index 9) with 0.1 Ether and then received 0.126 Ether (index 17) from the game. The received Ether is transferred to 0x94c0d029a with a SELFDESTRUCT operation (index 18). During this process, it obtains a profit of 0.26 Ether. We queried the *Data Aggregator* for similar transactions from this smart contract. There are 1,332 transaction, which earned 250.8225 Ether in total.

Our next analysis intends to understand why the Fomo3D game sends 0.126 Ether to the malicious smart contract previously discussed. Since the transfer occurs after the invocation of buyXid (index 9), we manually analyzed its source code. The function eventually invokes the core function. This function increases the balance (plyr_[pID].win) of a player, if the return value of the call to airdrop function is true. The airdrop function calculates a random seed based on the information of the block, e.g., timestamp, difficulty, and the address of the caller smart contract (0x73542fcd, index 9). After that, it will compare the seed with another variable to determine the return value as true or false. According to the source code, this is a mechanism called AirDrop to randomly send bonus to players, if the return result of the airdrop function is true (code snippet is shown in Figure 13 in Appendix).

Surprisingly, the contract 0x73542fcd is created by 0xbe997116, and its only transaction is to buy the key and get the bonus. We suspect that attackers have a mechanism to predict whether it can win the bonus before buying the key. Since the random seed depends on block information (which are fixed values for a block) and the address of the caller smart contract. If attackers can control an address of a smart contract, then they can predict the result of whether winning the bonus.

Accordingly to Section 2.1, the address of a newly created smart contract is calculated using the address of its creator and nonce, thus the attacker could predict the address of the smart contract it is going to create, and predict whether it will win the bonus.

Figure 12 shows the attack flow. There is a controller contract, which creates a lot of proxy contracts (more than 1,000). Then during the attack, the controller attack loops through each proxy contract. It calculates the address of a newly created smart contract if it is created by the proxy contract (but does not actually create it.) Then it uses this address and the block information to predict whether it will get the bonus by executing a same logic with the airdrop function in the Fomo3D contract. If so, the proxy smart contract creates the attacking contract, which further buys the key to play the game and win the bonus. After that, the attacking contract self-destructs itself to transfer the earned bonus to the controller smart contract.

Table 6: The comparison of JSTracer and our system to replay 100 normal transactions.

Tools		Retrieve Snapshot	Execute Script	Other
JSTracer		39m6s997ms	0m16s984ms	8m13s467ms
	Total	47m37s448ms		
Our system		0m0s446ms	0m0s217ms	0m0s544ms
	Total	0m1s207ms		

5.4 Performance

In this section, we report the performance of our system. All the experiments were performed on a machine with four CPUs (Intel(R) Xeon(R) Silver 4110 CPU @ 2.10GHz) and 128G memory.

Data Aggregator The purpose of *Data Aggregator* is to quickly locate suspicious transactions. In our experiment, our system takes around 3 minutes to retrieve normal transactions used for the the reentrancy (20, 101) and the bad randomness attack (8, 466, 950) from 686, 664, 752 normal transactions.

Replay Engine and Instrumentation Framework In the following, we will compare the performance of JSTracer supported by Geth and our system.

First, we randomly pick 100 normal transactions that triggered internal transactions. Then, we develop an analysis script that has a same functionality with the example [9] (*4byte_tracer.js*) provided by Geth. Finally, we use the JSTracer and our system to *replay* 100 normal transactions. Note that, a normal transaction could trigger multiple internal transaction. The total number of normal and internal transactions replayed is 2, 519.

Table 6 shows the result. Our system takes only around 1 seconds to replay the transactions, while JSTracer uses more than 47 minutes (around 2, 300x speed up). We further explore the reasons.

- **Granularity of historical states** In order to retrieve snapshot of the 100 normal transactions, JSTracer *replayed* 3, 289 additional normal transactions. However, EthScope can retrieve snapshot directly by querying fine-grained states from *Data Aggregator*.
- **Number of context switches** JSTracer needs to switch to the JavaScript environment for each opcode. However, our *Instrumentation Framework* only performs context-switch when instrumentation points are hit. Therefore, EthScope performed 2, 502 context switches, while JSTracer performed 1, 305, 864 switches.

This results shows that our system successfully solves the scalability challenges and can replay a larger number of transactions. In fact, for the 8, 466, 950 normal transactions used to detect the bad randomness attack, our system takes *10h44m9s616ms* to replay them. Without the optimization, it’s nearly impossible to replay such as large number of transaction in JSTracer.

Our system parallelizes the replay process according to the number of transactions and CPU cores. We report the performance improvement due to this optimization in Table 7. During the experiment, we use two groups of 1, 000 normal transactions. The first group contains normal transactions. For each one, it will trigger more than 20 internal transactions. This is for the scenario of multiple interactions between contracts. The second group contain the transactions that only trigger one internal transaction. This

Table 7: Performance gain of using multithreading. Group 1: 1000 normal transactions that will trigger more than 20 internal transactions; Group 2: 1000 simple normal transactions that will trigger only one internal transaction.

	Group 1	Group 2
Single thread	1m42s358ms	0m14s802ms
Multithreading	0m12s458ms	0m1s570ms

represents a simple function invocation. The result shows that by using multithreading, our system can have a speedup of around 10x.

6 DISCUSSION

False negatives The purpose of our system is to detect malicious smart contracts and understand their behaviors. Analysts use *Data Aggregator* to quickly locate suspicious transactions, and then use the latter two components to confirm malicious behaviors at runtime. Compared with other static analysis tools, our system may have false negatives, which means it may miss some malicious smart contracts. However, it usually has low false positives. During the evaluation, we do find that it can locate some attacks that are missed in previous research. For instance, our system successfully detected real attacks to two vulnerable smart contracts (0x72f60eca0db6811274215694129661151f97982e and another one 0xd4cd7c881f5cece4917d856ce73f510d7d0769e) that were previously unknown. Nevertheless, we can combine other static analysis tools. For instance, our system could replay transactions of the vulnerable smart contracts reported by other systems [30, 35, 39–41, 43, 45, 49–51] to locate *real* attacks.

Usability Though we have demonstrated the effectiveness of our system, an analyst still needs the domain knowledge to first locate suspicious transactions. One potential direction is to use new techniques, e.g., machine learning algorithms to automatically locate suspicious ones. Currently, our system provides a dynamic taint engine to facilitate the analysis. In the future, we can integrate more components, e.g., dynamic symbolic execution, into the system to ease the development of analysis scripts.

7 RELATED WORK

Data analysis frameworks of Ethereum The proposed graph analysis method [34] collects Ethereum states and then performs money flow analysis, account creation analysis and contract invocation analysis. DataEther [33] first instruments an Ethereum full node to collect data and then uses ElasticSearch [6] to store the collected data. Similar with our system, they can be used to locate suspicious transactions. However, they do not have the capability to introspect the execution of smart contracts to detect attacks.

Static analysis tools of smart contracts Recent studies have focused on vulnerability detection, including Oyente [41], Mythril [13], Osiris [50], MAIAN [43], ContractFuzzer [39], ILF Fuzzer [38], Securify [51] and ZEUS [40]. These systems only provide a *static* view of smart contract code, i.e., whether they are vulnerable or not. They cannot provide a *dynamic* view of contract interactions (or transactions). This limitation motivates the development of our system. Note that, our approach *does not* intend to replace them,

but complements them to provide capabilities to detect malicious smart contracts. In fact, their outputs could provide hints to locate suspicious transactions, e.g., transactions interact with vulnerable contracts reported by these systems.

Dynamic analysis tools of smart contracts Dynamic analysis has been regarded as an effective complement to the static analysis for security purposes. ECFChecker [37], Sereum [46] and SODA [31] are representative ones. Both Sereum [46] and ECFChecker [37] focus on the detection of the reentrancy attack. Our system is an extensible framework that could be leveraged to detect multiple types of attacks. SODA [31] can detect 8 inappropriate behaviors. However, it is tightly coupled with the importing process of blockchain data, and cannot be used to analyze selected transactions to detect attacks.

8 CONCLUSION

In this paper, we design and implement a transaction-centric security analytics framework for malicious smart contracts detection. It provides an efficient way to locate suspicious transactions and an extensible way to detect malicious contracts with analyst-provided scripts. We solved multiple technical challenges to build such a framework. The evaluation result shows the effectiveness and efficiency of our system.

REFERENCES

[1] 2014. Ethereum Official Website. <https://www.ethereum.org/>. [Online; accessed May-2020].

[2] 2014. Ethereum White Paper. <https://github.com/ethereum/wiki/wiki/White-Paper>. [Online; accessed May-2020].

[3] 2014. Etherscan. <https://etherscan.io>. [Online; accessed May-2020].

[4] 2014. Go Ethereum. <https://geth.ethereum.org>. [Online; accessed March-2020].

[5] 2015. ERC20 Token Standard. <https://github.com/ethereum/EIPs/blob/master/EIPS/eip-20.md>. [Online; accessed March-2020].

[6] 2015. Open Source Search & Analytics At Elasticsearch. <https://www.elastic.co>. [Online; accessed May-2020].

[7] 2015. Query DSL. <https://www.elastic.co/guide/en/elasticsearch/reference/current/query-dsl.html>. [Online; accessed May-2020].

[8] 2017. Duktape JavaScript engine bindings for Go. <https://github.com/olebedev/go-duktape>. [Online; accessed May-2020].

[9] 2018. 4byte tracer. https://github.com/ethereum/go-ethereum/blob/master/eth/tracers/internal/tracers/4byte_tracer.js. [Online; accessed May-2020].

[10] 2018. eip-1014. <https://github.com/ethereum/EIPs/blob/master/EIPS/eip-1014.md>. [Online; accessed May-2020].

[11] 2018. Google's BigQuery. <https://cloud.google.com/blog/products/data-analytics/ethereum-bigquery-public-dataset-smart-contract-analytics>. [Online; accessed May-2020].

[12] 2018. JS tracer. https://github.com/ethereum/go-ethereum/wiki/Management-APIs#debug_tracetransaction. [Online; accessed May-2020].

[13] 2018. Mythril. <https://github.com/ConsenSys/mythril>. [Online; accessed May-2020].

[14] 2018. New batchOverflow Bug in Multiple ERC20 Smart Contracts (CVE-2018âÃ10299). <https://blog.peckshield.com/2018/04/22/batchOverflow/>. [Online; accessed March-2020].

[15] 2018. New burnOverflow Bug Identified in Multiple ERC20 Smart Contracts (CVE-2018-11239). <https://blog.peckshield.com/2018/05/18/burnOverflow/>. [Online; accessed March-2020].

[16] 2018. New ceoAnyone Bug Identified in Multiple Crypto Game Smart Contracts (CVE-2018âÃ11329). <https://medium.com/@peckshield/new-ceoanyone-bug-identified-in-multiple-crypto-game-smart-contracts-cve-2018-11329-898cdceac7e0>. [Online; accessed March-2020].

[17] 2018. New multiOverflow Bug Identified in Multiple ERC20-Based Smart Contracts (CVE-2018-10706). <https://blog.peckshield.com/2018/05/10/multiOverflow/>. [Online; accessed March-2020].

[18] 2018. New proxyOverflow Bug in Multiple ERC20 Smart Contracts (CVE-2018âÃ10376). <https://blog.peckshield.com/2018/04/25/proxyOverflow/>. [Online; accessed March-2020].

[19] 2018. New transferFlaw Bug Used For Possible Scam Token Listed In A Top Exchange (CVE-2018-10468). <https://blog.peckshield.com/2018/04/28/transferFlaw/>. [Online; accessed March-2020].

[20] 2018. Short Address Attack. https://www.reddit.com/r/ethereum/comments/6r9nhj/cant_understand_the_erc20_short_address_attack/. [Online; accessed March-2020].

[21] 2018. Welcome to the Ethereum Function Signature Database. <https://www.4byte.directory/>. [Online; accessed May-2020].

[22] 2019. Ethereum Archive Data. <https://infura.io/docs/ethereum/add-ons/archiveData>. [Online; accessed Feb-2020].

[23] 2019. Ethereum Yellow Paper. <https://ethereum.github.io/yellowpaper/paper.pdf>. [Online; accessed May-2020].

[24] 2019. Fallback Function. <https://solidity.readthedocs.io/en/v0.5.3/contracts.html#fallback-function>. [Online; accessed May-2020].

[25] 2019. Geth v1.9.0 Foundation Blog. <https://blog.ethereum.org/2019/07/10/geth-v1-9-0/>. [Online; accessed March-2020].

[26] 2019. How to PWN FoMo3D, a beginners guide. https://www.reddit.com/r/ethereum/comments/916xni/how_to_pwn_fomo3d_a_beginners_guide/. [Online; accessed May-2020].

[27] 2020. Understanding the Lend.Me Attack. <https://hackernoon.com/how-did-lendfme-lose-dollar25-million-to-a-reentrancy-attack-an-analysis-091iy32s7>. [Online; accessed May-2020].

[28] 2020. Understanding the Uniswap Attack. <https://blog.openzeppelin.com/exploiting-uniswap-from-reentrancy-to-actual-profit/>. [Online; accessed May-2020].

[29] Evgeny Medvedev Allen Day. 2018. Ethereum in BigQuery: a Public Dataset for smart contract analytics. <https://cloud.google.com/blog/products/data-analytics/ethereum-bigquery-public-dataset-smart-contract-analytics>. [Online; accessed Aug-2019].

[30] Lexi Brent, Anton Jurisevic, Michael Kong, Eric Liu, François Gauthier, Vincent Gramoli, Ralph Holz, and Bernhard Scholz. 2018. Vandal: A Scalable Security Analysis Framework for Smart Contracts. *CoRR abs/1809.03981* (2018). arXiv:1809.03981 <http://arxiv.org/abs/1809.03981>

[31] Ting Chen, Rong Cao, Ting Li, Xiapu Luo, Guofei Gu, Yufei Zhang, Zhou Liao, Hang Zhu, Gang Chen, Zheyuan He, et al. 2020. SODA: A Generic Online Detection Framework for Smart Contracts. In *Proceedings of the 27th Network and Distributed System Security Symposium*.

[32] Ting Chen, Xiaoqi Li, Ying Wang, Jiachi Chen, Zihao Li, Xiapu Luo, Man Ho Au, and Xiaosong Zhang. 2017. An Adaptive Gas Cost Mechanism for Ethereum to Defend Against Under-Priced DoS Attacks. In *International Conference on Information Security Practice and Experience*. Springer, 3–24.

[33] Ting Chen, Zihao Li, Yufei Zhang, Xiapu Luo, Ang Chen, Kun Yang, Bin Hu, Tong Zhu, Shifang Deng, Teng Hu, Jiachi Chen, and Xiaosong Zhang. 2019. DataEther: Data Exploration Framework for Ethereum. In *Proceedings of the IEEE International Conference on Distributed Computing Systems*.

[34] Ting Chen, Yuxiao Zhu, Zihao Li, Jiachi Chen, Xiaoqi Li, Xiapu Luo, Xiaodong Lin, and Xiaosong Zhang. 2018. Understanding Ethereum via Graph Analysis. In *Proceedings of the IEEE International Conference on Computer Communications*.

[35] Weili Chen, Zibin Zheng, Jiahui Cui, Edith Ngai, Peilin Zheng, and Yuren Zhou. 2018. Detecting Ponzi Schemes on Ethereum: Towards Healthier Blockchain Technology. In *Proceedings of the 2018 World Wide Web Conference*.

[36] Christof Ferreira Torres, Mathis Baden, Robert Norvill, and Hugo Jonker. 2019. ÆGIS: Smart Shielding of Smart Contracts. In *Proceedings of the 2019 ACM SIGSAC Conference on Computer and Communications Security*. 2589–2591.

[37] Shelly Grossman, Ittai Abraham, Guy Golan-Gueta, Yan Michalevsky, Noam Rinetzky, Mooly Sagiv, and Yoni Zohar. 2017. Online detection of effectively callback free objects with applications to smart contracts. *Proceedings of the ACM on Programming Languages* 2, POPL (2017), 1–28.

[38] Jingxuan He, Mislav Balunović, Nodar Ambroladze, Petar Tsankov, and Martin Vechev. 2019. Learning to Fuzz from Symbolic Execution with Application to Smart Contracts. In *Proceedings of the 2019 ACM SIGSAC Conference on Computer and Communications Security*. 531–548.

[39] Bo Jiang, Ye Liu, and W. K. Chan. 2018. ContractFuzzer: fuzzing smart contracts for vulnerability detection. In *Proceedings of the 33rd ACM/IEEE International Conference on Automated Software Engineering*.

[40] Sukrit Kalra, Seep Goel, Mohan Dhawan, and Subodh Sharma. 2018. Zeus: Analyzing safety of smart contracts. In *Proceedings of the 25th Annual Network and Distributed System Security Symposium*.

[41] Loi Luu, Duc-Hiep Chu, Hrishi Olickel, Prateek Saxena, and Aquinas Hobor. 2016. Making Smart Contracts Smarter. In *Proceedings of the 23rd ACM Conference on Computer and Communications Security*.

[42] Tai D. Nguyen, Long H. Pham, Jun Sun, Yun Lin, and Minh Quang Tran. 2020. sFuzz: An Efficient Adaptive Fuzzer for Solidity Smart Contracts. In *Proceedings of the 42th International Conference on Software Engineering*.

[43] Nvica Nikolić, Aashish Kolluri, Ilya Sergey, Prateek Saxena, and Aquinas Hobor. 2018. Finding The Greedy, Prodigal, and Suicidal Contracts at Scale. In *Proceedings of the 34th Annual Computer Security Applications Conference*.

- [44] Fei Peng, Zhui Deng, Xiangyu Zhang, Dongyan Xu, Zhiqiang Lin, and Zhendong Su. 2014. X-Force - Force-Executing Binary Programs for Security Applications. *Proceedings of the 2014 USENIX Security Symposium*.
- [45] Anton Permenev, Dimitar Dimitrov, Petar Tsankov, Dana Drachslers-Cohen, and Martin Vechev. 2020. VerX: Safety Verification of Smart Contracts. In *Proceedings of the 41st IEEE Symposium on Security and Privacy*.
- [46] Michael Rodler, Wenting Li, Ghassan O. Karamé, and Lucas Davi. 2019. Sereum: Protecting Existing Smart Contracts Against Re-Entrancy Attacks. In *Proceedings of the Network and Distributed Systems Security Symposium*.
- [47] Adam Schmideg. 2019. Tracing: Introduction. <https://github.com/ethereum/go-ethereum/wiki/Tracing:-Introduction>. [Online; accessed Aug-2019].
- [48] David Siegel. 2016. Understanding The DAO Attack. <https://www.coindesk.com/understanding-dao-hack-journalists>. [Online; accessed Aug-2019].
- [49] Sunbeom So, MyungHo Lee, Jisu Park, Heejo Lee, and Hakjoo Oh. 2020. VeriSmart: A Highly Precise Safety Verifier for Ethereum Smart Contracts. In *Proceedings of the 41st IEEE Symposium on Security and Privacy*.
- [50] Christof Ferreira Torres, Julian SchÄijtte, and Radu State. 2018. Osiris: Hunting for Integer Bugs in Ethereum Smart Contracts. In *Proceedings of the 34th Annual Computer Security Applications Conference*.
- [51] Petar Tsankov, Andrei Dan, Dana Drachslers-Cohen, Arthur Gervais, Florian BÄijnzli, and Martin Vechev. 2018. Securify: Practical Security Analysis of Smart Contracts. In *Proceedings of the 25th ACM Conference on Computer and Communications Security*.
- [52] Valentin Wüstholtz and Maria Christakis. 2019. Harvey: A Greybox Fuzzer for Smart Contracts. *CoRR* abs/1905.06944 (2019). arXiv:1905.06944 <http://arxiv.org/abs/1905.06944>

Table 8: ElasticSearch Indices

Index Name	Field	Field of Nested Field	Field of Nested Field of Nested Field	Field of Nested Field of Nested Field of Nested Field	
Block	Difficulty ^R ExtraData GasLimit ^R GasUsed Hash ^R Miner ^R Number ^R Timestamp ^R TxnCount				
	Transaction	CallFunction ^R ConAddress CumGasUsed FromAddress ^R GasLimit ^R GasPrice ^R GasUsed ^R GetCodeList ^R Hash ^R IntTxnCount Nonce ^R Status ToAddress ^R TxnIndex Value ^R			
		InternalTxns	CallFunction CallParameter ConAddress EvmDepth FromAddress GasLimit Output ToAddress TxnIndex Type Value		
		Logs	Address Topics Data		
		ReadCommittedState ^R	Address Balance CodeHash CodeSize Nonce		
			Storage		Key Value
		ChangedState	Address Balance Nonce		
			Storage		Key Value

Index Name	Field	Field of Nested Field	Field of Nested Field of Nested Field	Field of Nested Field of Nested Field of Nested Field
Code	Number Timestamp			
	Transaction	Hash TxnIndex Input ^R		
		Contract ^R	Address Hash Code	
State	Number Timestamp			
	Transaction	Hash TxnIndex Create Reset Suicide ^R		

^R : fields that are necessary for replaying transactions.


```

1 function buyXid(uint256 _affCode, uint256 _team)
2 {
3     ...
4     // buy core
5     buyCore(_pID, _affCode, _team, _eventData_);
6 }
7
8 function buyCore(uint256 _pID, uint256 _affID, uint256 _team, F3Ddatasets.EventReturns memory _eventData_)
9 {
10    ...
11    // if round is active
12    if (_now > round[_rID].strt + rndGap_ && (_now <= round[_rID].end || (_now > round[_rID].end && round[_rID].plyr == 0)
13        ))
14    {
15        // call core
16        core(_rID, _pID, msg.value, _affID, _team, _eventData_);
17    }
18    // if round is not active
19    } else {
20        ...
21    }
22 }
23 function core(...)
24 {
25     if (airdrop() == true)
26     {
27         uint256 _prize;
28         if (_eth >= 1000000000000000000)
29         {
30             // calculate prize and give it to winner
31             _prize = ((airDropPot_).mul(75)) / 100;
32             plyr[_pID].win = (plyr[_pID].win).add(_prize);
33         } else
34         {
35             ...
36         }
37     }
38 }
39
40 function airdrop()
41 {
42     uint256 seed = uint256(keccak256(abi.encodePacked(
43         (block.timestamp).add
44         (block.difficulty).add
45         ((uint256(keccak256(abi.encodePacked(block.coinbase)))) / (now)).add
46         (block.gaslimit).add
47         ((uint256(keccak256(abi.encodePacked(msg.sender)))) / (now)).add
48         (block.number)
49     ))));
50     if((seed - ((seed / 1000) * 1000)) < airDropTracker_)
51         return(true);
52     else
53         return(false);
54 }
55 }

```

Figure 13: Code snippet of the Fomo3D smart contract.

```

1{
2  transactionStart: function(log) {
3    this.tagToCodeSequence = {}
4    this.invocationID = -1
5    this.currentInvocation = []
6  },
7
8  callStart: function(log) {
9    this.invocationID ++
10   this.currentInvocation.push(this.invocationID)
11   callIdentifier = {}
12   callIdentifier["Type"] = "CallStart"
13   callIdentifier["EvmDepth"] = log.getDepth()
14   callIdentifier["DirectCallee"] = toHex(log.contract.getCodeAddress())
15   callIdentifier["DirectCaller"] = toHex(log.contract.getDirectCaller())
16   callIdentifier["InvocationID"] = this.currentInvocation[this.currentInvocation.length-1]
17   for (tag in this.tagToCodeSequence) {
18     this.tagToCodeSequence[tag].push(callIdentifier)
19   }
20 },
21
22 callEnd: function(log) {
23   this.currentInvocation.pop()
24 },
25
26 afterSha3: function(log) {
27   log.taint.labelStack(0, "SHA3")
28 },
29
30 sload: function(log) {
31   taints = log.taint.peekStack(0)
32   taintsLen = taints.length
33   if (taintsLen == 0) {
34     return
35   }
36   for (i = 0; i < taintsLen; i++) {
37     if (taints[i] == "SHA3") {
38       key = log.stack.peek(0).toString(16)
39       contextContract = toHex(log.contract.getSelfAddress())
40       tag = contextContract+"_"+key
41       log.taint.clearStack(0)
42       log.taint.labelStack(0, tag)
43       break
44     }
45   }
46 },
47
48 call: function(log) {
49   taints = log.taint.peekStack(2)
50   taintsLen = taints.length
51   if (taintsLen == 0) {
52     return
53   }
54   value = log.stack.peek(2).valueOf()
55   if (value == 0) {
56     return
57   }
58   ethTransferIdentifier = {}
59   ethTransferIdentifier["Type"] = "ETHTransfer"
60   ethTransferIdentifier["EvmDepth"] = log.getDepth()
61   ethTransferIdentifier["InvocationID"] = this.currentInvocation[this.currentInvocation.length-1]
62   ethTransferIdentifier["DirectCallee"] = toHex(log.contract.getCodeAddress())
63   ethTransferIdentifier["DirectCaller"] = toHex(log.contract.getDirectCaller())
64   for (i = 0; i < taintsLen; i++) {
65     tag = taints[i]
66     if (!(tag in this.tagToCodeSequence)) {
67       this.tagToCodeSequence[tag] = []
68     }
69     this.tagToCodeSequence[tag].push(ethTransferIdentifier)

```

```

70     }
71 },
72 callcode: function(log) {
73     this.call(log)
74 },
75 create: function(log) {
76     this.call(log)
77 },
78 create2: function(log) {
79     this.call(log)
80 },
81
82 jumpi: function(log) {
83     taints = log.taint.peekStack(1)
84     taintsLen = taints.length
85     if (taintsLen == 0) {
86         return
87     }
88     condIdentifier = {}
89     condIdentifier["Type"] = "Cond"
90     condIdentifier["EvmDepth"] = log.getDepth()
91     condIdentifier["InvocationID"] = this.currentInvocation[this.currentInvocation.length-1]
92     condIdentifier["DirectCallee"] = toHex(log.contract.getCodeAddress())
93     condIdentifier["DirectCaller"] = toHex(log.contract.getDirectCaller())
94     for (i = 0; i < taintsLen; i++) {
95         tag = taints[i]
96         if (!(tag in this.tagToCodeSequence)) {
97             this.tagToCodeSequence[tag] = []
98         }
99         this.tagToCodeSequence[tag].push(condIdentifier)
100     }
101 },
102
103 sstore: function(log) {
104     key = log.stack.peek(0).toString(16)
105     contextContract = toHex(log.contract.getSelfAddress())
106     tag = contextContract+"_"+key
107     resetIdentifier = {}
108     resetIdentifier["Type"] = "Reset"
109     resetIdentifier["EvmDepth"] = log.getDepth()
110     resetIdentifier["InvocationID"] = this.currentInvocation[this.currentInvocation.length-1]
111     resetIdentifier["DirectCallee"] = toHex(log.contract.getCodeAddress())
112     resetIdentifier["DirectCaller"] = toHex(log.contract.getDirectCaller())
113     if (tag in this.tagToCodeSequence) {
114         this.tagToCodeSequence[tag].push(resetIdentifier)
115     }
116 },
117
118 transactionEnd: function(log) {
119     for (tag in this.tagToCodeSequence) {
120         codeSequence = this.tagToCodeSequence[tag]
121         length = codeSequence.length
122         for (i = 0; i < length; i++) {
123             startCode = codeSequence[i]
124             if (startCode["Type"] == "Cond") {
125                 startDepth = startCode["EvmDepth"]
126                 startCallee = startCode["DirectCallee"]
127                 startCaller = startCode["DirectCaller"]
128                 reenterInvocationIDs = {}
129                 condInRee = false
130                 resetInRee = false
131                 for (j = i+1; j < length; j++) {
132                     code = codeSequence[j]
133                     if (code["Type"] == "CallStart") {
134                         if (code["EvmDepth"] <= startDepth) {
135                             break
136                         }

```

```

137         if (code["DirectCallee"] == startCallee && code["DirectCaller"] == startCaller)
138             {
139                 reenterInvocationIDs[code["InvocationID"]] = true
140             }
141         } else if (code["Type"] == "Cond" && code["InvocationID"] in reenterInvocationIDs) {
142             condInRee = true
143         } else if (code["Type"] == "Reset" && code["InvocationID"] in reenterInvocationIDs)
144             {
145                 resetInRee = true
146             } else if (code["Type"] == "Reset" && condInRee && resetInRee) {
147                 if (code["DirectCallee"] == startCallee && code["InvocationID"] == startCode["
148                     InvocationID"]) {
149                     return toHex(log.getTxnHash())
150                 } else if (code["DirectCallee"] != startCallee && code["Invocation"] > startCode
151                     ["InvocationID"]) {
152                     return toHex(log.getTxnHash())
153                 }
154             }
155         }
156     } else if (startCode["Type"] == "ETHTransfer") {
157         startDepth = startCode["EvmDepth"]
158         startCallee = startCode["DirectCallee"]
159         startCaller = startCode["DirectCaller"]
160         reenterInvocationIDs = {}
161         isReenter = false
162         for (j = i+1; j < length; j++) {
163             code = codeSequence[j]
164             if (code["Type"] == "CallStart") {
165                 if (code["EvmDepth"] <= startDepth) {
166                     break
167                 }
168                 if (code["DirectCallee"] == startCallee && code["DirectCaller"] == startCaller)
169                     {
170                         reenterInvocationIDs[code["InvocationID"]] = true
171                     }
172             } else if (code["Type"] == "ETHTransfer" && code["InvocationID"] in
173                 reenterInvocationIDs) {
174                 isReenter = true
175             } else if (code["Type"] == "Reset" && isReenter) {
176                 if (code["DirectCallee"] == startCallee && code["InvocationID"] == startCode["
177                     InvocationID"]) {
178                     return toHex(log.getTxnHash())
179                 } else if (code["DirectCallee"] != startCallee && code["InvocationID"] >
180                     startCode["InvocationID"]) {
181                     return toHex(log.getTxnHash())
182                 }
183             }
184         }
185     }
186 }
187 }
188 }
189 }
190 }
191 }
192 }
193 }
194 }
195 }
196 }
197 }
198 }
199 }
200 }
201 }
202 }
203 }
204 }
205 }
206 }
207 }
208 }
209 }
210 }
211 }
212 }
213 }
214 }
215 }
216 }
217 }
218 }
219 }
220 }
221 }
222 }
223 }
224 }
225 }
226 }
227 }
228 }
229 }
230 }
231 }
232 }
233 }
234 }
235 }
236 }
237 }
238 }
239 }
240 }
241 }
242 }
243 }
244 }
245 }
246 }
247 }
248 }
249 }
250 }
251 }
252 }
253 }
254 }
255 }
256 }
257 }
258 }
259 }
260 }
261 }
262 }
263 }
264 }
265 }
266 }
267 }
268 }
269 }
270 }
271 }
272 }
273 }
274 }
275 }
276 }
277 }
278 }
279 }
280 }
281 }
282 }
283 }
284 }
285 }
286 }
287 }
288 }
289 }
290 }
291 }
292 }
293 }
294 }
295 }
296 }
297 }
298 }
299 }
300 }
301 }
302 }
303 }
304 }
305 }
306 }
307 }
308 }
309 }
310 }
311 }
312 }
313 }
314 }
315 }
316 }
317 }
318 }
319 }
320 }
321 }
322 }
323 }
324 }
325 }
326 }
327 }
328 }
329 }
330 }
331 }
332 }
333 }
334 }
335 }
336 }
337 }
338 }
339 }
340 }
341 }
342 }
343 }
344 }
345 }
346 }
347 }
348 }
349 }
350 }
351 }
352 }
353 }
354 }
355 }
356 }
357 }
358 }
359 }
360 }
361 }
362 }
363 }
364 }
365 }
366 }
367 }
368 }
369 }
370 }
371 }
372 }
373 }
374 }
375 }
376 }
377 }
378 }
379 }
380 }
381 }
382 }
383 }
384 }
385 }
386 }
387 }
388 }
389 }
390 }
391 }
392 }
393 }
394 }
395 }
396 }
397 }
398 }
399 }
400 }
401 }
402 }
403 }
404 }
405 }
406 }
407 }
408 }
409 }
410 }
411 }
412 }
413 }
414 }
415 }
416 }
417 }
418 }
419 }
420 }
421 }
422 }
423 }
424 }
425 }
426 }
427 }
428 }
429 }
430 }
431 }
432 }
433 }
434 }
435 }
436 }
437 }
438 }
439 }
440 }
441 }
442 }
443 }
444 }
445 }
446 }
447 }
448 }
449 }
450 }
451 }
452 }
453 }
454 }
455 }
456 }
457 }
458 }
459 }
460 }
461 }
462 }
463 }
464 }
465 }
466 }
467 }
468 }
469 }
470 }
471 }
472 }
473 }
474 }
475 }
476 }
477 }
478 }
479 }
480 }
481 }
482 }
483 }
484 }
485 }
486 }
487 }
488 }
489 }
490 }
491 }
492 }
493 }
494 }
495 }
496 }
497 }
498 }
499 }
500 }
501 }
502 }
503 }
504 }
505 }
506 }
507 }
508 }
509 }
510 }
511 }
512 }
513 }
514 }
515 }
516 }
517 }
518 }
519 }
520 }
521 }
522 }
523 }
524 }
525 }
526 }
527 }
528 }
529 }
530 }
531 }
532 }
533 }
534 }
535 }
536 }
537 }
538 }
539 }
540 }
541 }
542 }
543 }
544 }
545 }
546 }
547 }
548 }
549 }
550 }
551 }
552 }
553 }
554 }
555 }
556 }
557 }
558 }
559 }
560 }
561 }
562 }
563 }
564 }
565 }
566 }
567 }
568 }
569 }
570 }
571 }
572 }
573 }
574 }
575 }
576 }
577 }
578 }
579 }
580 }
581 }
582 }
583 }
584 }
585 }
586 }
587 }
588 }
589 }
590 }
591 }
592 }
593 }
594 }
595 }
596 }
597 }
598 }
599 }
600 }
601 }
602 }
603 }
604 }
605 }
606 }
607 }
608 }
609 }
610 }
611 }
612 }
613 }
614 }
615 }
616 }
617 }
618 }
619 }
620 }
621 }
622 }
623 }
624 }
625 }
626 }
627 }
628 }
629 }
630 }
631 }
632 }
633 }
634 }
635 }
636 }
637 }
638 }
639 }
640 }
641 }
642 }
643 }
644 }
645 }
646 }
647 }
648 }
649 }
650 }
651 }
652 }
653 }
654 }
655 }
656 }
657 }
658 }
659 }
660 }
661 }
662 }
663 }
664 }
665 }
666 }
667 }
668 }
669 }
670 }
671 }
672 }
673 }
674 }
675 }
676 }
677 }
678 }
679 }
680 }
681 }
682 }
683 }
684 }
685 }
686 }
687 }
688 }
689 }
690 }
691 }
692 }
693 }
694 }
695 }
696 }
697 }
698 }
699 }
700 }
701 }
702 }
703 }
704 }
705 }
706 }
707 }
708 }
709 }
710 }
711 }
712 }
713 }
714 }
715 }
716 }
717 }
718 }
719 }
720 }
721 }
722 }
723 }
724 }
725 }
726 }
727 }
728 }
729 }
730 }
731 }
732 }
733 }
734 }
735 }
736 }
737 }
738 }
739 }
740 }
741 }
742 }
743 }
744 }
745 }
746 }
747 }
748 }
749 }
750 }
751 }
752 }
753 }
754 }
755 }
756 }
757 }
758 }
759 }
760 }
761 }
762 }
763 }
764 }
765 }
766 }
767 }
768 }
769 }
770 }
771 }
772 }
773 }
774 }
775 }
776 }
777 }
778 }
779 }
780 }
781 }
782 }
783 }
784 }
785 }
786 }
787 }
788 }
789 }
790 }
791 }
792 }
793 }
794 }
795 }
796 }
797 }
798 }
799 }
800 }
801 }
802 }
803 }
804 }
805 }
806 }
807 }
808 }
809 }
810 }
811 }
812 }
813 }
814 }
815 }
816 }
817 }
818 }
819 }
820 }
821 }
822 }
823 }
824 }
825 }
826 }
827 }
828 }
829 }
830 }
831 }
832 }
833 }
834 }
835 }
836 }
837 }
838 }
839 }
840 }
841 }
842 }
843 }
844 }
845 }
846 }
847 }
848 }
849 }
850 }
851 }
852 }
853 }
854 }
855 }
856 }
857 }
858 }
859 }
860 }
861 }
862 }
863 }
864 }
865 }
866 }
867 }
868 }
869 }
870 }
871 }
872 }
873 }
874 }
875 }
876 }
877 }
878 }
879 }
880 }
881 }
882 }
883 }
884 }
885 }
886 }
887 }
888 }
889 }
890 }
891 }
892 }
893 }
894 }
895 }
896 }
897 }
898 }
899 }
900 }
901 }
902 }
903 }
904 }
905 }
906 }
907 }
908 }
909 }
910 }
911 }
912 }
913 }
914 }
915 }
916 }
917 }
918 }
919 }
920 }
921 }
922 }
923 }
924 }
925 }
926 }
927 }
928 }
929 }
930 }
931 }
932 }
933 }
934 }
935 }
936 }
937 }
938 }
939 }
940 }
941 }
942 }
943 }
944 }
945 }
946 }
947 }
948 }
949 }
950 }
951 }
952 }
953 }
954 }
955 }
956 }
957 }
958 }
959 }
960 }
961 }
962 }
963 }
964 }
965 }
966 }
967 }
968 }
969 }
970 }
971 }
972 }
973 }
974 }
975 }
976 }
977 }
978 }
979 }
980 }
981 }
982 }
983 }
984 }
985 }
986 }
987 }
988 }
989 }
990 }
991 }
992 }
993 }
994 }
995 }
996 }
997 }
998 }
999 }
1000 }

```

Figure 14: The script to detect *reentrancy* attacks

```

1{
2  transactionStart: function(log) {
3    this.contracts = {}
4  },
5
6  callStart: function(log) {
7    input = log.contract.getInput()
8    inputLength = input.length
9    log.taint.clearInput(0, inputLength)
10 },
11
12 // pseudo random number source
13 afterBlockhash: function(log) {
14   log.taint.labelStack(0, "blockhash")
15 },
16
17 afterCoinbase: function(log) {
18   log.taint.labelStack(0, "coinbase")
19 },
20
21 afterTimestamp: function(log) {
22   log.taint.labelStack(0, "timestamp")
23 },
24
25 afterNumber: function(log) {
26   log.taint.labelStack(0, "number")
27 },
28
29 afterDifficulty: function(log) {
30   log.taint.labelStack(0, "difficulty")
31 },
32
33 afterGaslimit: function(log) {
34   log.taint.labelStack(0, "gaslimit")
35 },
36
37 // Comparison operations
38 lt: function(log) {
39   taints0 = log.taint.peekStack(0)
40   taints0Len = taints0.length
41   taints1 = log.taint.peekStack(1)
42   taints1Len = taints1.length
43   if (taints0Len < 2 && taints1Len < 2) {
44     return
45   }
46   taints = taints0
47   value = log.stack.peek(0).toString(16)
48   taintsLen = taints0Len
49   if (taints0Len < 2) {
50     taints = taints1
51     taintsLen = taints1Len
52     value = log.stack.peek(1).toString(16)
53   }
54   tag = "randomness"
55   for (i = 0; i < taintsLen; i++) {
56     tag += "_" + taints[i]
57   }
58   tag += "_" + value
59   log.taint.clearStack(0)
60   log.taint.clearStack(1)
61   log.taint.labelStack(0, tag)
62 },
63 gt: function(log) {
64   this.lt(log)
65 },
66
67 slt: function(log) {
68   this.lt(log)
69 },

```

```

70  sgt: function(log) {
71      this.lt(log)
72  },
73
74  eq: function(log) {
75      this.lt(log)
76  },
77
78  // Control decision
79  jumpi: function(log) {
80      taints = log.taint.peekStack(1)
81      taintsLen = taints.length
82      if (taintsLen == 0) {
83          return
84      }
85      codeContract = toHex(log.contract.getCodeAddress())
86      pc = log.getPc().toString()
87      for (i = 0; i < taintsLen; i++) {
88          tag = taints[i]
89          if (tag.indexOf("randomness_") != -1) {
90              lastIdx = tag.lastIndexOf("_")
91              randomNumber = tag.substring(lastIdx+1)
92              randomSources = {}
93              j = 0
94              nextIdx = tag.indexOf("_", j)
95              while(nextIdx != lastIdx) {
96                  endIdx = tag.indexOf("_", j+1)
97                  randomSources[tag.substring(nextIdx+1, endIdx)] = true
98                  j++
99                  nextIdx = tag.indexOf("_", j)
100             }
101             this.contracts[codeContract] = {}
102             this.contracts[codeContract][pc] = {"RandomNumber": randomNumber, "RandomSources":
103                 randomSources}
104         }
105     },
106
107     transactionEnd: function(log) {
108         flag = false
109         for (contracta in this.contracts) {
110             for (pca in this.contracts[contracta]) {
111                 randomnessa = this.contracts[contracta][pca]
112                 for (contractb in this.contracts) {
113                     if (contracta == contractb) {
114                         continue
115                     }
116                     for (pcb in this.contracts[contractb]) {
117                         randomnessb = this.contracts[contractb][pcb]
118                         if (randomnessa["RandomNumber"] == randomnessb["RandomNumber"] && this.
119                             compareSources(randomnessa["RandomSources"], randomnessb["RandomSources"])) {
120                             flag = true
121                         }
122                     }
123                 }
124             }
125             contracts = []
126             for (contract in this.contracts) {
127                 contracts.push(contract)
128             }
129             if (flag) {
130                 return {"Hash": toHex(log.getTxnHash()), "Contracts": contracts}
131             }
132         },
133
134         compareSources: function(source1Dict, source2Dict) {
135             for (source in source1Dict) {
136                 if (!(source in source2Dict)) {
137                     return false
138                 }
139             }
140             return true
141         }
142     }

```

Figure 15: The script to detect the bad randomness attack

Table 9: Groups of attackers that are exploiting the reentrancy vulnerability. * represents false positives.

Creator	# Entrance Contracts	# Attacks	# Reentry Points
1. 0xa568641f3032c3d2fd83d69215c9ad5971a4cd55	1	1063	1
2. 0x60f3fdb85b2f7faaa888ca7afc382c57f6415a81	1	525	2
3. 0x79f09717c5b352078234832e5737651ddb333548	4	297	1
4. 0x969837498944ae1dc0dcac2d0c65634c88729b2d	2	245	1
5. 0xf35e2cc8e6523d683ed44870f5b7cc785051a77d	2	245	1
6. 0xbe3ae5cb97c253dda67181c6e34e43f5c275e08b	4	175	2
7. 0x1dba1131000664b884a1ba238464159892252d3a	3	137	1
8. 0x15def77337168d707e47e68ab9f7f6c17126b562	1	42	1
9. 0x53eefe54c5a21bc6495f9e5d1b1d5c4e648ab612	1	41	1
10. 0xa9bf70a420d364e923c74448d9d817d3f2a77822	1	29	1
11. 0x06b671106bf4de59243111c0fece9f43da91595f	2	25	1
12. 0xac80cba14c08f8a1242ebd0fd45881cfee54b0a2	1	25	1
13. 0x42dd879f8eb7e9b43036a5b4c97b02c6176d6b99	6	9	1
14. 0x20b01a7624c44f37078de96dcc8d5fc4aded7321	2	8	1
15. 0xfc4746b3f38f029737608315d63d17f7e867ed35	2	7	1
16. 0xcdf267ea3f1ebae3c29fea0a3253f94f3122c2199	2	7	1
17. 0xd9ded446ce2076eb24ad24477da7ea4a1d0f129a	3	5	5
18. 0xe6002189a74b43e6868b20c1311bc108e38aac57	1	5	1
19. 0x003cefcb1b679b780caea9ff58f9287ad59d83b00	2	5	1
20. 0xef0fde3af93aa69364b9b83ea7d13b43793474da	4	4	4
21. 0x4fae38ced4c4b1360d0535108bb1cbc376cb37a6	3	3	2
22. 0x827806ff62a98ecae9778f316ffdf85fd94276d0d	3	3	3
23. 0xa70d9810eda6e14810593270a8d57e3965bf890e	1	3	1
24. 0x5e2073e67dc5e1132d2eb45affdd7944614c7959	1	3	3
25. 0x00ecc4224b897ef5d43b43b83c0dc9a4a8c38c53*	1	2	2
26. 0xbc936aee249651aa6f93ccb09244600d50eb1d77	1	2	1
27. 0x6b35c9f9670c0641e3d5e80642992223d1ffec7b	1	2	2
28. 0x0fb928e2939833ac5baba628df4a295c39f4e583	1	2	1
29. 0xe500732effa4922a97671cd310c613ba88c32315	1	2	1
30. 0x7bf9a7eccc2d1de1833b20b6ce9bdddcef58722	2	2	2
31. 0x62781f11b58e2caf8f28eabc73fe711c634dcff*	1	1	1
32. 0x13c7c27ea7ee89ec6607965b6f357b0109bc98b4	1	1	1
33. 0x2b122ead009e73de6d76eae0bcc5d9cc52e67f08	1	1	1
34. 0x7da2da424c133b1786fe55e5ec507dd8250ebaa1	1	1	1
35. 0xf96d92dcf5449936732a56e083c3f8168ff3931c	1	1	1
36. 0x44aacc12b62a7037072b85934d5cc9d91fe8921	1	1	1
37. 0x20c945800de43394f70d789874a4dac9cfa57451	1	1	1
38. 0x4d9f0ce2893f2f1bc0a0f0ba60aee3176c9f5f91	1	1	1
39. 0xbc61043bc52195b124906cc57bf74fe12f530634	1	1	1
40. 0x60534599e4b2148425effaca9d059eccadafb235	1	1	1
41. 0xf7f0cd609e58437693c4f41075b30d8caf543acc	1	1	1
42. 0x38a9f04fc6a7619cf8daf34d9cc709d17be8023a	1	1	1
43. 0x110cffcd772c73c7b9c2e00e6c9b5fdede85dcc0	1	1	1
44. 0x3e8d62fd679ece9f0a20a66e4105891d26fa92ca	1	1	1
45. 0x100c3ecf14aa1354598ce7bec42909b6e9e97243	1	1	1
46. 0xef38208167b81c817624653527dcd7e476346568	1	1	1
47. 0x8cfee63a79a0d1fb97241ee91d39922491b6f449	1	1	1
48. 0xb96d122b5d031012db46f6120a6c6609d50acc04	1	1	1
49. 0xde7e47b63d49a2ff2a209807b1d57513a9968a5b	1	1	1
50. 0x83c72b3039a8ded0ce019ea42a9c835f7c3c645b	1	1	1
51. 0x66425a8b84205f891717383fd828e633484deab5	1	1	1
52. 0x91e4ff13ba4d5e276407a2be0f267c0ae6bd5cb4	1	1	1
53. 0x7d1db8e1403ac25229e6a091825908aafbe5c0b8	1	1	1
54. 0x1447e5c3f09da83c8f3e3ec88f72d8e07ee69288	1	1	1
55. 0x09b1f49f2e8507e42c02e7dedd6d1d1f00d2ce4f	1	1	1
56. 0x5b7d4606f14dda7cc4a33b94b06a9c114a32fa9e	1	1	1
57. 0xe9d2faf204ab4787936c0d9afdf9ec236955e055	1	1	1
58. 0x46eb9f8ea419bf7dd2d3ea46a179222c60ff43c1	1	1	1
59. 0xfe46e84affad0eb8016eaa0549a46552d19fe7a2*	1	1	1

Table 10: 49 Contracts susceptible to the *reentrancy* vulnerability. * represent false positive.

Contract Address	Contract Name
0xbb9bc244d798123fde783fcc1c72d3bb8c189413	TheDAO
0xffcf45b540e6c9f094ae656d2e34ad11cdfdb187	Uniswap
0x0eee3e3828a45f7601d5f54bf49bb01d1a9df5ea	Lend.Me
0xd654bdd32fc99471455e86c2e7f7d7b6437e9179	Anonymous
0xbf78025535c98f4c605f9e9eaf672999abf19dc1	Anonymous
0xf91546835f756da0c10cfa0cda95b15577b84aa7	LedgerChannel
0x304a554a310c7e546dfe434669c62820b7d83490	TheDarkDAO
0xdf4b83a451ef20b925ce39f4da2a021722688370	M_BANK
0xcead721ef5b11f1a7b530171aab69b16c5e66b6e	WALLET
0x83a3a9b3068911b55a3989df0e642f487d08e424	CA_BANK
0xcb6fe98097fe7d6e00415bb6623d5fc3effa4e83	THE_BANK
0xa4e1cbf64c3b5db2a6e6f23cb5286b97d80b86e3	WWW_wallet
0xfe1b613f17f984e27239b0b2dccb1778888dfae	InstaDice
0xf5cff81d51e81596519ecf61830cb084037a2218	Anonymous
0x55791ea128a7b7fc871272d9147435a3abb3d1eb	Anonymous
0x7c6220c9537946a0861d7e86f6423af526f41375	Anonymous
0xac629878277bf6a2fc46857eac4d4dd17bfa330f	Anonymous
0x23a91059fdc9579a9fbd0edc5f2ea0bfdb70deb4	PrivateBank
0xb4c05e6e4cdb07c15095300d96a5735046eef999	PrivateBank
0xb93430ce38ac4a6bb47fb1fc085ea669353fd89e	PrivateBank
0x95d34980095380851902ccd9a1fb4c813c2cb639	Private_Bank
0xd116d1349c1382b0b302086a4e4219ae4f8634ff	Private_Bank
0x4a8d3a662e0fd6a8bd39ed0f91e4c1b729c81a38 *	HODLWallet
0x4122073496955adb48e9a1dfaf6e456631b595a1	Anonymous
0x2d5df43d54ae164a912db8de092cf707b446f693	CA_BANK
0x463f235748bc7862deaa04d85b4b16ac8fafef39	PrivateBank
0xa5d6acc5695327f65cbf38da29198df53efdcf0	Private_accumulation_fund
0x59752433dbe28f5aa59b479958689d353b3dee08	Anonymous
0xaaef1f51cf3339f18b6d3f3bdc75a5facd744b0b8	DEP_BANK
0x6e3c384480e71792948c29e9fc8d7b9c9d75ae8f	p_bank
0xe610af01f92f19679327715b426c35849c47c657	PIGGY_BANK
0xbabfe0ae175b847543724c386700065137d30e3b	PrivateBank
0xdd71e35f680bb5adc77c6d1d9ef5793598e613dc	Piggy_BanK
0x62781f11b58e2caf8f28eaebc73fe711c634dcff *	WRD Genesis (WRD)
0xf01fe1a15673a5209c94121c45e2121fe2903416	Anonymous
0x903643251af408a3c5269c836b9a2a4a1f04d1cf	SysEscrow
0xb7c5c5aa4d42967efe906e1b66cb8df9ceb04f7	keepMyEther
0xb3e396f500df265cdfde30ec6e80dbf99bee9e96	pg_bank
0x8ce53575e1ce89131b370cbed602ce8cfa4f7805	Anonymous
0x26b8af052895080148dabbc1007b3045f023916e	Anonymous
0x0eb68f34efa0086e4136bca51fc4d0696580643e	BetingHouse
0x72f60eca0db6811274215694129661151f97982e	DecentralizedExchanges
0xd4cd7c881f5ceece4917d856ce73f510d7d0769e	DecentralizedExchanges
0x3ac969b43affc4e0684dc52dc3072b109d0e348d	Bank
0x3e64b1a66f3aa6f0765b093540481aa690c2b9b7	Anonymous
0x4b23577c0672ab1e436097b7daceadb75e5721c6	Pg_Bank
0x857a8d8aa8d83562f9118405335bd4a1fb523317	I_bank
0xfdb27beadad89f8282c51f5e5a4e77c1f19d7220	CB_Bank
0x5d84fc93a6a8161873a315c233fbd79a88280079 *	Exchange

Table 11: Group of attackers that exploit the bad randomness vulnerability. * represent false positive.

Creator	# Contracts	# Transactions
1. 0x820d115b9c982260edaa1741812d1f85132736b5	9	22257
2. 0x825d5d0df3b2d59f69cc673f041ca91a296b8183	2	6577
3. 0x78931c77e417244f283f09eb116a9b98ce57cb4f	10	2628
4. 0x53062a2cb2402919f257a3d520bbeff73c3d57673	4	1351
5. 0x8871759b2530fee82cd1b31c534252a1db707b0b	3	1333
6. 0xeb54f65775e6a2a42e243823d86486a64fd1f0d6	4	1314
7. 0xb5f5655e8be6039173fef87191e53c86f799f7ca	4	597
8. 0x3b43721d9ef5de30f7ccae187a07897e2673cf19	3	570
9. 0xe7eca2a94e9d59848f3c1e1ffaacd881d4c3a4f2	6	499
10. 0xc1a065a2d29995692735c82d228b63df1732030e	6	431
11. 0x87614f3c2deca896a8e71f9662e5ae68736fe206	4	376
12. 0x32dc12b8f205e22faa39de17da3c44335286761c	14	373
13. 0x8537aa2911b193e5b377938a723d805bb0865670	4	359
14. 0x6fae851378b9c1499d4fe9d01895c515365ed9dc	5	282
15. 0xc1e3be3b4c9f24941f14986da505265aab57ea61	1	215
16. 0xad5723c4f7b4c478e09688f96a7a477b0d1196fd	3	185
17. 0x7ad54ee3255b05392aa52942d946fb0664a6c14e	1	102
18. 0x2ca860ad6b4d2c79a88fb5b1628810f2bf487287	2	89
19. 0xef398210245fb5a173965e0cef80cfa53cb85df7	1	76
20. 0x7f2f933ee22b802935449911fc8c7f35fb00409c	1	68
21. 0x20c945800de43394f70d789874a4dac9cfa57451	20	65
22. 0xb14ba25ada2912b27c0586a6f038583bbf0a8646	1	60
23. 0xdead9824214b40e672e9058cab9248faabaaccb4	1	59
24. 0xb3e20b057cbf2c0d9d099bac6772af0c948c6ade	3	56
25. 0x84ecb387395a1be65e133c75ff9e5fcc6f756db3	3	46
26. 0x0f2f24d9ecc21fec00c9ef065dd3e01010b05568	3	40
27. 0xf31ef7ae2323459ffedd10b4f0b056d51634f5d5	1	37
28. 0x0f007aa14325f3d477e19f8e8a022ce2418c12d5	3	34
29. 0x0040a706fc31f3ca4b52ea128f984a808504b0c0	2	29
30. 0x3d133759dfebaccbb2252df6a423fbf152ed48f4	2	25
31. 0x642fbb45842764a9b5e56bfb1e9b0b1fd0ced490	9	24
32. 0x501f51187acfbbfb711166dea9ee5bbf77c6c2d8 *	3	23
33. 0x8981ce4369dc1e24663a241a24a8d1eab9aa5c96	3	19
34. 0x860e21abcc3b9c10635a65c8a3bc7f1ba692211c *	1	19
35. 0xc8fdecdbf1cfe62ffa64bb7eb359ed80a7554d82	1	17
36. 0x217ad253c41fe23f2bc5706262695b54c95a7442	11	17
37. 0x125d657d5cd16bf4864a2850d3f2541d9a0f3b50	1	14
38. 0xea4c732d337a61677518a5483ff4b57bde2b9097	1	10
39. 0x80028f80c7d5959c3eaf45a95bf3a1a0724352f6	1	9
40. 0xd1e88e048fc8f8ba954f1dbb260c811c0793c67b	1	9
41. 0xddf543429e415a262e7617d76196621cb8375d20	4	8
42. 0xb7784f0b98d049bb73435044c5879cc78365f168 *	2	8
43. 0x11e52c75998fe2e7928b191bfc5b25937ca16741	7	7
44. 0x85cf54dd216997bcf324c72aa1c845be2f059299	1	7
45. 0x687256e8b7221518c096a4ff1824554b3b26ee5e	1	7
46. 0x15fda64fcdca27a60aa8c6ca882aa3e1de4ea41	7	7
47. 0x73ba784a1a8f5531e9ebf3d4fddba0b90ef72beb	1	7
48. 0xcdbddd0477ffe1b4b150aaebbc03d1cb816766af	1	6
49. 0xbb81cd73c786799505feb9dfed0760dfc5aaedbf	1	6
50. 0xc54100fc034d412c21ba92ccf2d916374ac22555	1	5
51. 0xd06e2cf7f623457d9660723a15b969f6724a376f	4	4
52. 0x1b0dff20922e219276ff0a3496afdc02d92948a2 *	1	4
53. 0x0d7f11536f61ff477bcb4f440d677296de60e7d3	2	3
54. 0x231f702070aacdbde867b323996a96fed8adca10	2	3
55. 0x58f34b689444902a90e46c9b15019919a3458507	1	3
56. 0x04528fb91840ce4bcfc7390919a455d530da8ecb	1	3
57. 0xf01974963ebfc94019744de0e371d12d95669f90	3	3
58. 0x31f197a7374ca0712a483232f661cf52f08581e2	1	2
59. 0x8e6e2c3af26f20c82574109ffd461a7520fd9f95	2	2
60. 0xc1a9e3ff212d401cb83b1db43422eab141cb1ca7	2	2
61. 0x0eaf6b9bee938435f71c1c3f8b998ee338d7b8c3	2	2
62. 0x2041c60347ba953d3715c8519a12345b69cf7168	2	2
63. 0xa78bbf97033e534c54b0a4fa62aa77b652ae4097 *	2	2
64. 0xb28f3c831c676276288e4dd7230c6b67d8b35384	1	2
65. 0x2ab1604ce06f26904caf5094a7789d2451f96eb	1	1
66. 0x50bdd6ce3554123fb5040139e16b22787768296f	1	1
67. 0x524984fe428acff3d809bdf4d1fa44f53a713b07	1	1
68. 0x358ddb3bec0b9aee58006c99ec04abc25e56a71b	1	1
69. 0x0242f5a05c702057c9f7828678c68611fd1ef603	1	1
70. 0x32a93668e60399c67df9808b8642f812375beadb	1	1

Creator	# Contracts	# Transactions
71. 0xe432c5017d18fc17a85d69a73548b803a99119d8	1	1
72. 0x1a1fc363665144b6f322e4950b4458c79a6f7a66	1	1
73. 0x2d819d8b01291401df2bb2b38956231ccf321dc6	1	1
74. 0xa20c551aa9e5f890c046a410ff910ba4e3f88650	1	1
75. 0xaef3a90a83c29ec6f0c2171b905fadcb615a1dd15	1	1
76. 0x51702659c5defe636b5b084a5ed16fd1066e6420	1	1
77. 0x81f4c798b6412e5c58311b59d99553ee9d48022d	1	1
78. 0x7e7e2bf7edc52322ee1d251432c248693ecd9e0f	1	1
79. 0x4469bc6bd2ba2acda7841c2350d0d1de7f26521f	1	1

Table 12: Vulnerable contracts susceptible to the bad randomness attack.

Contract Address	Contract Name
Ponzi Game	
0xa62142888aba8370742be823c1782d17a0389da1	FoMo3D Long Official (F3D)
0x205718799d502fe2c45d3afc91c3c8ccb5c0836f	Vote Bhelp (Bhelp)
0xcb47c89cb17c10b719fc5ed9665bae157cac2cb1	FoMoJP
0x29488e24cfdaa52a0b837217926c0c0853db7962	SuperCard
0x0fc53f7c2659a708f46d0c4336eb8c1e0f551307	Bingo3D (B3D)
0xdd9fd6b6f8f7ea932997992bbe67eabb3e316f3c	Last Winner (LW)
0xcc8aabf5199a93c6cff2495761cbb70e056b41a5	MC2long
0x8a883a20940870dc055f2070ac8ec847ed2d9918	RatScam
0x0ad3227eb47597b566ec138b3afd78cfea752de5	FoMo3Dshort
0x9872ffc47ff6ae0cbdec2f68bb88ad3169d69afc	FoMo4D (F4D)
0x86d179c28cceb120cd3f64930cf1820a88b77d60	FoMoGame
0x460a5098248f4aa1a46eec6aac78b7819ea01c42	Suoha
0x7ebd56cc7c1d14788ed09179f67cdcf2778c6535	JCLYLong
0x52083b1a21a5abc422b1b0bce5c43ca86ef74cd1	FoMo3Dshort
0x24da016c06941ec2c92be28e0a2b2e679f0d1dc7	FoMo3DLightning
0x9edc05176ae3bba98c3112ac842269b225e55722	JCLYLong
0x0b5da756938e334c97ce20715e32a4a8fea12ba9	F3Dultra
0x6de7fd35c2f9b25b0efe85621306e9de41eab97f	F3DGo
0xb73f8f75cc233ec7a451d44859e06167e47c1942	LastUnicorn
0xf9ba0955b0509ac6138908ccc50d5bd296e48d7d	FoMo3D Fast Official (F3D)
0x0f90ef4e2526e3d1791862574f9fb26a0f39ec86	F3DPLUS
0x58232003b3d18021acfc9213d27d6f8b72f4f029	Rich3D
0x820dfa17d30f938dc2c172b716630a06ec759d99	FullFOMO
0xa9b9805d0fed371cec8fb8a8f2300f279c47ba53	F4Kings
0x3664be8ec8a66e8dab9dfa48e5092f576edab746	FOMO Loop (LOOP)
0xab4e6f106fff4e80f8d0689c61d235fc430f629e	HX
0x51a5271ec514c3065d9de2d8e95051989f7d53ab	imfomo Long Official (imfomo)
0x39ffccecc551f35f8dfcb52c8c01060919aed1ea	FoMo3DUnlimited
0x43312c23f2e8fe11390329c15079717c5b27b8b9	F3DLink
0xda8d7ff0d043848a689125e2c7ab87b16a0cbe81	SnowStorm
0xb2b30d39074c52a60283a26f238abff31fcb4217	SnowStorm
0x103d98686ced96f1d2cf1a0d1eabdd63c9c027e4	F3DShop
0xcc55c087d027c5dd3b0f3c28280c3a3fdd798c8b	FoMo4D (F4D)
0xf5ad74c2a4deeffd1e5e27d1221a4ca33214277	NTE 3D Official (NTE3D)

Contract Address	Contract Name
0x05aa2fdf9f58b426b49900834cce0565d88e52eb	Bingo4Beast Long Official (B4B)
0xfc812ef2661a99cd21ab452edcbab505583fe40b	Famo
0x202d16c018d31d60fe179a67901444565e0f0cc7	FoMo6D (F6D)
0xb6cadfb7d4d900f8152954a58bff03901a57c2e2	FoMo3K
0x7b20471396cedf00cd1f65eca27fdb3ca1643b6c	SpicyPot
0x7802b44acc5f37b4843d10f7c4eaec1c36bc7d2d	OK3D (OK3D)
0xb3640c4e8b8317cbe65aa4f20c7851996e6b406c	NTech3DLong
0x5cd17346bc2b8b3b04251dfea7763dbc70ccef7	FoMo3D Asia (Official) (F3DA)
0x20c3811a83fad33dc7a0c8ee2d1e773ddf3b7d44	Damo
0xe69ba47f38ee8ab38696014c19b547a4aa955480	XMG Long Official (XMG)
0x603f234b6c1cf8104a0791a1cc32ee73cd73cab7	FoMo6D (F6D)
0x1ca95b07290db4cb91f9efc9060a8df2a8eaf00	F5D (F5D)
0xf1ae594cefee0bf519f227f3262ee2a851b14b9a	FoMo3D World (F3DW)
0xe19c616ff1efc079792df6b5583d2cf3e6e77d10	The Winner (WINNER)
0x8c74f1ed536e79de5cb225f035bc989ae84493f7	FomoSuper
0x6db943251e4126f913e9733821031791e75df713	ReadyPlayerONE
0x2a71ae354d82c16233416e96374ef324b12a5646	Must Be Hit 4D (MBT4D)
0xf5fe6b716c0cd0e88059d8b3d8385c086012eb0e	Gold medal winner Official (Gold)
0x3bb5e74f7ff56e0b64d326f8ec07236aa4a07260	Greedy
Russian Roulette	
0x0ab2c9e20aa31fd3a3728a86f2526cca06a2b76d	RussianRoulette
0xef02c45c5913629dd12e7a9446455049775eec32	RuletkaLo
Airdrop Mechanism of BEB Token	
0x4669f488ce2df5b95ced6c058eca6034b9c25921	LUCK
0x2e72dd0a0fb5d4f40d3c68f42a4abef2a99075fc	LUCK
0xf64094e8cd7100b8cda6352a5954c0f6217659f1	LUCK
Slot Machine	
0x71c11a3b3a13a2e4a23c760722691952319ac7b9	Roulette
0x5cfa2f4f77bbd15d6415e33c16c2c85096ccea4a	MyDice
0x510467f65a600926af2ed565419ad98cf1f706ed	Slotthereum
0x755ebf95883f9167d51a4ea95035e16421be865d	EtherDie
0x419a058dca91d152d36c4c6888aafd3890ce7429	EtherDie
0x0b2d2b5e550f77ee125d3898ead74331ccf1da76	EtherDie
0x8eb58b6239cc369ef8bf0bc5f41d8b5aac5f8b90	EtherDie
0x13fbbbea6f440c2fa56ff8f90ff984118a2df0500	ETHGIVER
0x9d8542f45611e043a0379779eadc1071c6332763	Anonymous
0x28cc60c7c651f3e81e4b85b7a66366df0809870f	Ethereum_doubler
0x233820087a752349ee20daab1c18e0b7c546d3f6	Anonymous

Contract Address	Contract Name
0x87f31ab270ecf848663d64d3ab0998de2088a226	SlotMachine
0x2e089902dec3406b548b6a014516695a1e5e3104	PIPOTFlip
0xcb4fc459c926e5e10b698009f6f3c1ed658faef7	Coinflip
0x9ac63e7a52247b05ac878f1ede7b1e1285a54843	BountyHunter
0xf767fca8e65d03fe16d4e38810f5e5376c3372a8	LuckyDoubler
0x46ee746d396bb2808e8fa41dc658036aee51d857	EthMash
0xdbac44c23964a8913ac102b78bb85bf58b01e5c6	EJackpot
0x30fe5c5197a761ac173bd29869d2c7a9e1770126	InstaLottos
0x4429d240b0ef7617cb415edaec5e9050eee943bf	Anonymous
0x5caeebfab3cd8655e04692351237efb7462c9d8f	VfSE_Lottery
0x46b6434711a2dfab29a7069844968752db387ddc	DiceRoll
0x9d8542f45611e043a0379779eadc1071c6332763	Anonymous
0xb0e6cebb35fbea49a46b568cced98173c58f36de	Anonymous
0x48198311ac8d81929c0e67e00dfc789b706178e9	Slot
0xd6b3d9e44f767f0c178f60d24fb186ba49bc444a	Slot
0xf509f55692aeab739605a1815562c2f898fa6fd4	LuckyNumbers
Dragon King	
0xa03b5ea89ede664ccb3b4a49c5b25f6a4658e174	DragonKing
0x0c7f4cddb7460ec4170466634f97cfbbeeda1961	Anonymous
0x0aad44d047661bd190fb45640072c949d8129ef3	Anonymous
0x3bc5bd64fff1b1a4054732abf23d8b100d991031	FootBall
0x9ce0b408a4f15d222f6624895687efa1e1a4247b	ETHERKUN
Lottery	
0x3d60f58f8bf0c4d45646116257f2717281a3d471	BREBuy
0x103992432927f7ed1a5b3dc0e34186f80b16d93c	Tiles
0x6a21a83da9863d929a3d70c55bee2536fa48d544	GalaxyETHNormalJackpot
0xb3ac6256c0dcaaf45b1e7c60993ed5edee10e1fa	Revolution
0x6dcdce5853cfbcbe4e3eb15c9ab2277983387cd9	Revolution
False Positives	
0x2248bfa3babbf53fdc058167584a642d13eebfed	Anonymous
0x7c91ca2620cfbaabdf440007c3b0ef5a4ac22370	Anonymous
0x2fc79fa0f714d588835698ebe1965c511c03bb57	Anonymous
0xc89137ceeb35115ed3a3cb0e3f5e865da963c51c	Anonymous
0x8c60d767daf8cbc8e9a4899fb2eb0bbf9bbf8c20	Anonymous
0xb77feddb7e627a78140a2a32cac65a49ed1dba8e	GeneScience
0x7c91ca2620cfbaabdf440007c3b0ef5a4ac22370	Anonymous